
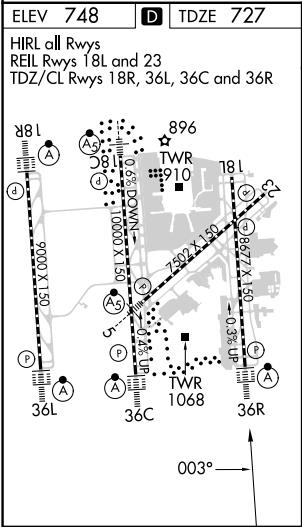


WAAS CH 90100 W36D	APP CRS 003°	Rwy Idg TDZE 727 Apt Elev 748
--	------------------------	---

RNAV (GPS) Y RWY 36R

CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH.					ALSF-2	MISSED APPROACH: Climb to 1320 then climbing right turn to 4000 direct LOCAS and hold.	
	Circling NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALSF, increase LNAV/VNAV all Cats visibility to 1½ mile.						
D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER		GND CON		CLNC DEL
ARR 121.15	(001°-119°) 128.32	(120°-295°) 120.05	(Rwys 18L-36R) 118.1 257.8	(Rwy 18C-36C) 126.4 257.8	121.8 348.6 (WEST)	127.15	
DEP 132.1	(296°-360°) 134.75		(Rwy 18R-36L) 133.35 257.8		121.9 348.6 (EAST)	348.6	

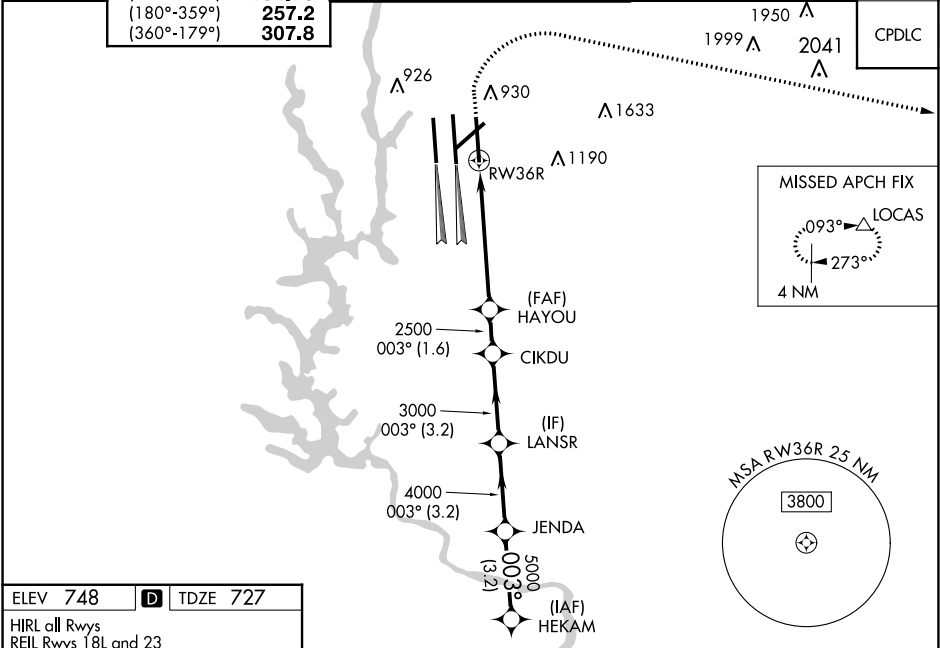

1320 4000 LOCAS		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 74).	
*LNAV only.		HEKAM	
1.6		3.8 NM	1.6 NM
CATEGORY		A	B
LPV DA		927/18	200 (200-½)
LNAV/VNAV DA		1229-1¼	502 (500-1¼)
LNAV MDA		1320/24 593 (600-½)	1320-1¼ 593 (600-1¼)
CIRCLING		1380-1 632 (700-1)	1500-2¼ 752 (800-2¼)