


WAAS	APP CRS	Rwy Idg	7500
CH 69508	273°	TDZE	664
W27B		Apt Elev	680

RNAV (GPS) RWY 27R

CHICAGO O'HARE INTL (ORD)

RNP APCH.				ALSF-2 	MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct OBK VOR/DME and hold, continue climb-in-hold to 4000.	
RADAR required for procedure entry.						
▼ Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C.						
D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 128.15 348.0	GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC

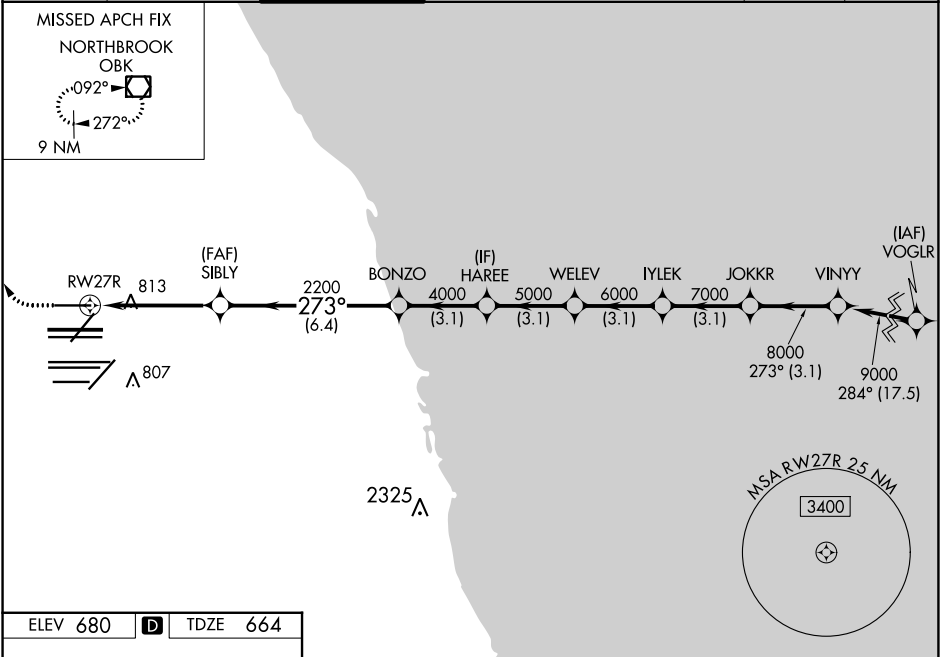

ELEV 680	D	TDZE 664
1100 4000 OBK		
* LNAV only.		
SIBLY 2200 * 1.3 NM to RW27R		
BONZO 4000		
HAREE 5000		
WELEV 6000		
IYLEK 7000		
JOKKR 8000		
VINNY 9000		
GP 3.00° TCH 55		
CATEGORY A		
LPV DA		864/18 200 (200-½)
LNAV/VNAV DA		961/24 297 (300-½)
LNAV MDA		1120/24 456 (500-½) 1120/45 456 (500-¾)