

RNAV (GPS) RWY 28C
CHICAGO O'HARE INTL (ORD)

MISSED APPROACH:
Climb to 1100 then
climbing left turn to
4000 direct DPA
VOR/DME and hold.

RADAR REQUIRED

813
RW28C
797 807
ZUPTI
1.8 NM to RW28C

(FAF) SEIKA

2300
273° (5.7)

HAZIL

4000
273° (3.1)

(IF) RZUKO

5000
273° (3.1)

MEMAW

6000
273° (3.1)

KOENN

7000
273° (3.1)

SNTOE

8000
273° (3.1)

LNDUH

9000
277° (17.2)

(IAF) VOGLR


2325

MISSED APCH FIX
DUPAGE
DPA
068°
248°
4 NM


MSA R W28C 2.5 NM
3400

ELEV	680	D	TDZE	651
------	-----	----------	------	-----

RADAR REQUIRED

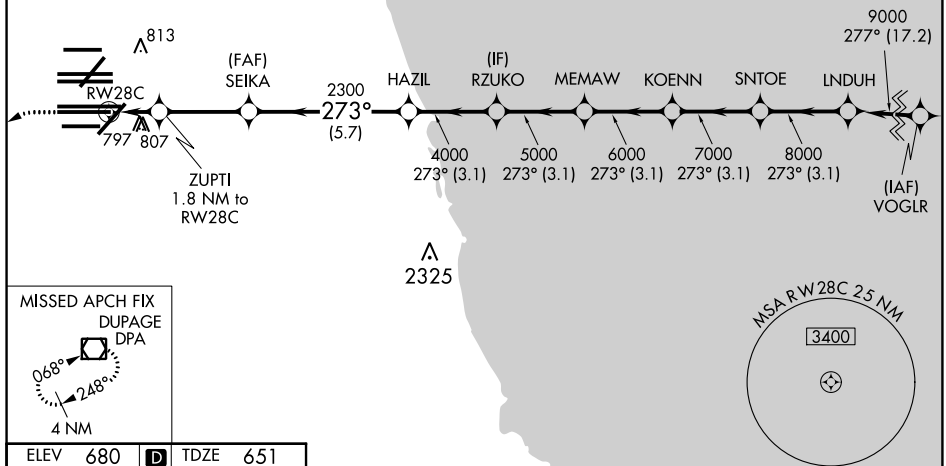

ELEV	680	D	TDZE	651
------	-----	----------	------	-----

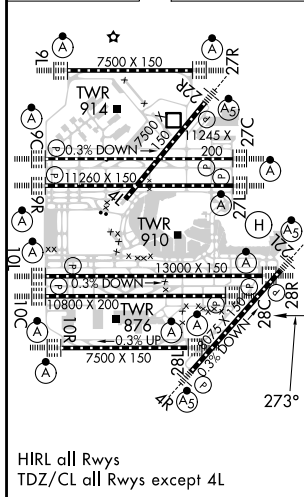

	VGSIs and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 80).									
*LNAV only.										
CATEGORY	A			B			C			D
LPV DA				851/18			200 (200-½)			
LNAV/VNAV DA				1094/50			443 (500-1)			
LNAV MDA	1060/24			409 (400-½)			1060/40			409 (400-¾)