


WAAS CH 99508 W09B	APP CRS 093°	Rwy Idg 7500 TDZE 668 Apt Elev 680
--	------------------------	---

RNAV (GPS) RWY 9L

CHICAGO O'HARE INTL (ORD)

RADAR required for procedure entry. RNP APCH.		ALS-F-2 	MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct OBK VOR/DME and hold, continue climb-in-hold to 4000.
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C.			

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 128.15 348.0	GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6	CPDLC
--	--	-------------------------------------	---	---	--------------------------	-------

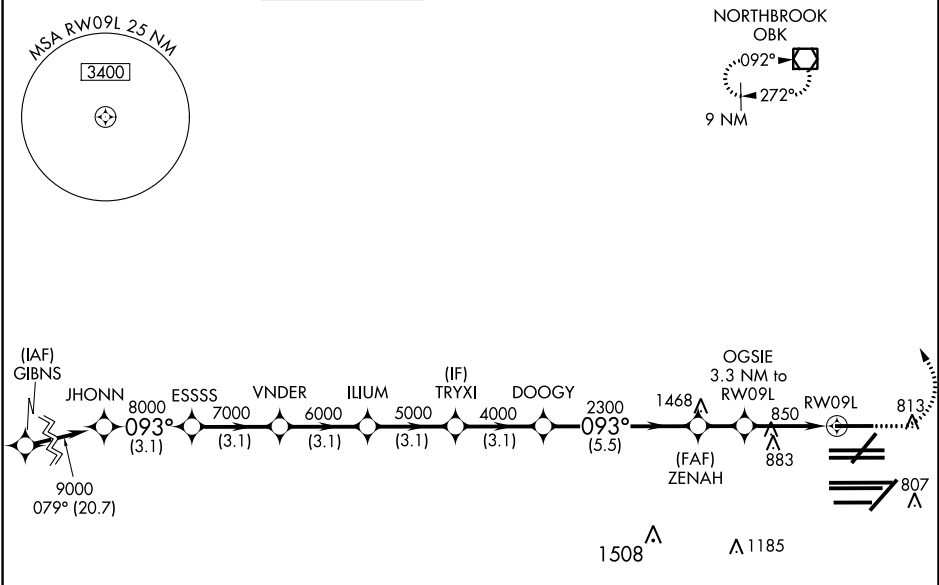

										ELEV 680		D	TDZE 668			
										1100	4000	OBK				
										↑	↙	☐				
JHONN										ESSSS	VNDER	ILIUM	TRYXI	ZENAH	OGSIE	*LNAV only.
9000	093°	8000	7000	6000	5000	4000	2300	2300	*1760	3.3 NM to RW09L	*1.2 NM to RW09L	RW09L				
GP 3.00°	TCH 55	3.1 NM	3.1 NM	3.1 NM	3.1 NM	3.1 NM	5.5 NM	1.7 NM	2.1	1.2						
CATEGORY		A		B		C		D								
LPV DA		868/18		200 (200-½)												
LNAV/VNAV DA		1034/35		366 (400-¾)												
LNAV MDA		1100/24		432 (500-½)		1100/40		432 (500-¾)								

HIRL all Rwys
TDZ/CL all Rwys except 4L