

LOC I-MSL 109.7	APP CRS 297°	Rwy Idg 6694
	TDZE 551	
	Apt Elev 551	

ILS Z or LOC Z RWY 30
NORTHWEST ALABAMA RGNL (MSL)

DME required. RADAR required.

▼


▲

DME from MSL DME.
Simultaneous reception of I-MSL and MSL DME required.
For inop ALS increase S-LOC 30 Cats C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 on heading 020° to intercept RQZ VORTAC R-268 to JOBUM/RQZ VORTAC 42.5 DME/RADAR and hold, continue climb-in-hold to 3000.

ASOS 119.425	MEMPHIS CENTER 120.8 307.0	GCO 121.725	UNICOM 123.05 (CTAF) 0
------------------------	--------------------------------------	-----------------------	----------------------------------

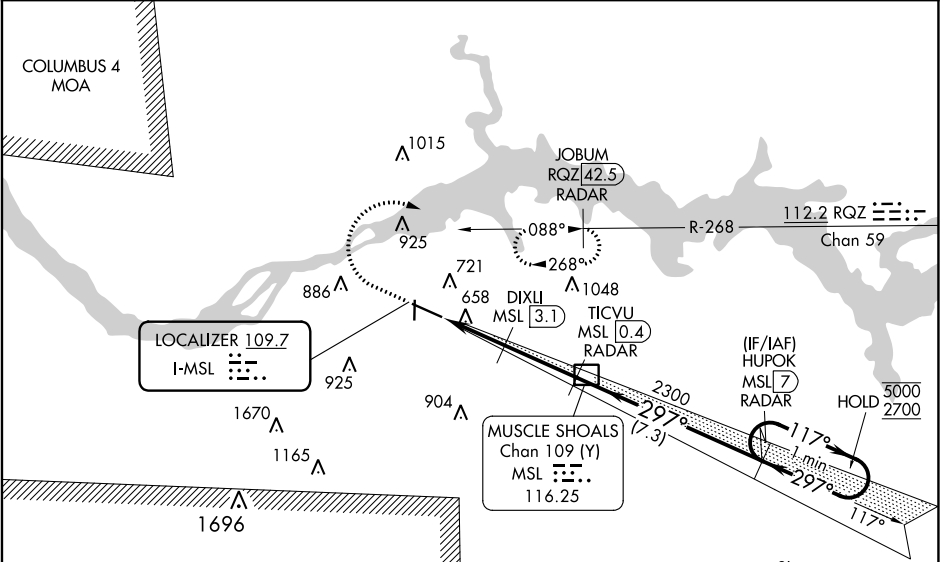

ELEV 551

TDZE 551

1200

3000

RQZ R-268

JOBUM RQZ 42.5 RADAR

MSL DME

HUPEK MSL 7 RADAR

One Minute Holding Pattern

117°

297°

5000

2700

GS 3.00°

TCH 59

	1 NM	1.5 NM	2.8 NM	7.3 NM	
CATEGORY	A		B	C	D
S-ILS 30	751-1/2		200 (200-1/2)		
S-LOC 30	920-1/2 369 (400-1/2)		920-5/8 369 (400-5/8)		
CIRCLING	1040-1 489 (500-1)		1280-2 729 (800-2)	1280-2 1/4 729 (800-2 1/4)	

SE-4, 16 MAY 2024 to 13 JUN 2024

SE-4, 16 MAY 2024 to 13 JUN 2024