

LOC/DME I-UBR
110.9
Chan **46**

APP CRS
275°

Rwy Idg
TDZE **17**
Apt Elev **17**

LOC RWY 27
SAN DIEGO INTL (SAN)

From LYNDI: RNAV 1-DME/DME/IRU or GPS required.

RNAV 1-DME/DME/IRU or GPS required for procedure entry.

▼

▲

Rwy 27 helicopter visibility reduction below 1 SM NA. Circling NA north of Rwy 9-27. Inop table does not apply to Cats A and B. For inop ALS, increase S-27 Cats C and D visibility to 1 1/8 SM.


MALS

④

≡

MISSED APPROACH: Climb to 2500 on heading 275° and on MZB VORTAC R-255 to CCADE INT/MZB 12.3 DME and hold.

D-ATIS 134.8	SOCAL APP CON 119.6 363.1 (WEST) 124.35 279.625 (EAST)	LINDBERGH TOWER 118.3 338.225	GND CON 123.9	CLNC DEL 125.9	CPDLC
------------------------	--	---	-------------------------	--------------------------	-------

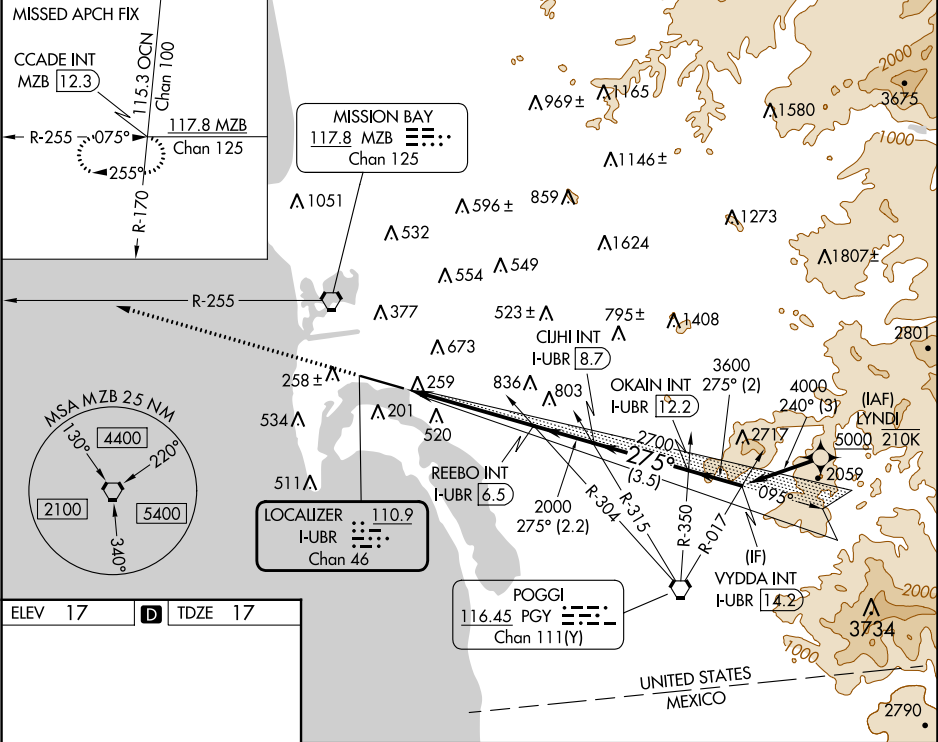

2500 hdg 275°		MZB R-255	CCADE INT	VYDDA INT I-UBR 14.2	
275°		REEBO INT I-UBR 6.5		CUHI INT I-UBR 8.7	OKAIN INT I-UBR 12.2
I-UBR 1.3		2000		2700	3600
275°		2700		3600	4000
5.2 NM		2.2 NM		3.5 NM	2 NM
CATEGORY	A	B	C	D	
S-27	680-1	663 (700-1)	680-1 3/4	663 (700-1 3/4)	
✻ CIRCLING	820-1	803 (900-1)	840-2 1/2 823 (900-2 1/2)	940-3 923 (1000-3)	