

WAAS CH 78306 W07A	APP CRS 074°	Rwy Idg 6052 TDZE 13 Apt Elev 14
--	------------------------	---

RNAV (GPS) RWY 7
SANTA BARBARA MUNI (SBA)



RNP APCH-GPS.

⚠ Inop table does not apply to LNAV/VNAV. For inop MALSR when using Oxnard altimeter setting, increase LPV all Cats visibility to 1½, and LNAV Cat C to 1¾, Cat D to 2. For inop MALSR, increase LPV all Cats visibility to RVR 6000. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 49°C. Baro-VNAV NA when using Oxnard altimeter setting. When local altimeter setting not received, use Oxnard altimeter setting and increase all DAs/MDAs 100 feet, and increase, LNAV/VNAV visibility Cat C and D ½ mile, LNAV Cat C to RVR 6000, Cat D ¼ mile, Circling Cat A visibility ½ mile, Cat C visibility ½ mile. VDP NA when using Oxnard altimeter setting. Circling Rwy 15R NA at night. Circling NA for Cats C and D north of Rwy 7-25.

MALSR

MISSED APPROACH: Climb to 4000 direct CESRA and right turn via 165° track to IYOBE and right turn via 251° track to GOLET and hold, continue climb-in-hold to 4000.

ATIS 132.65	SANTA BARBARA APP CON★ 120.55 319.15 (151°-329°) 125.4 291.1 (330°-150°)	SANTA BARBARA TOWER★ 119.7 (CTAF) 0 254.35	GND CON 121.7	CLNC DEL 132.9	UNICOM 122.95
-----------------------	--	---	-------------------------	--------------------------	-------------------------

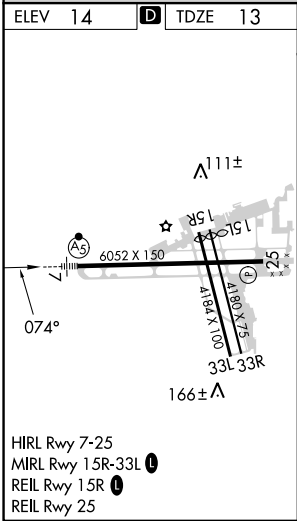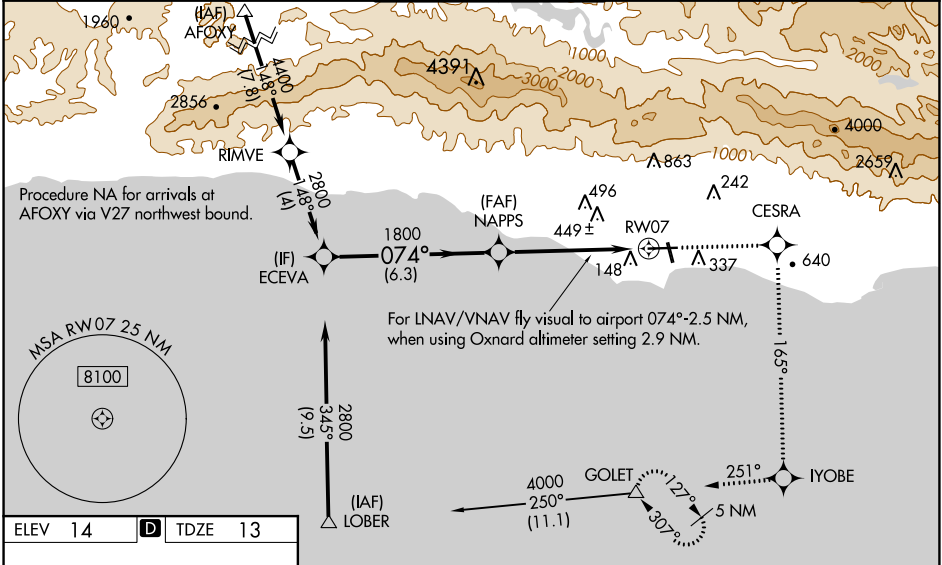

ECEVA		Procedure Turn NA		4000	CESRA	IYOBE	GOLET
				↑	✧	↷ tr 165°	↷ tr 251° △
2800		NAPPS		*LNAV only		For LNAV/VNAV fly visual to airport, 074° -2.5 NM, when using Oxnard altimeter setting 2.9 NM.	
GP 3.00° TCH 48		✖		*1.6 NM to RW07		RW07	
074°		1800		1.6			
6.3 NM		3.8 NM		1.6			
CATEGORY	A		B		C		D
LPV DA	380/40 367 (400-¾)						
LNAV/VNAV DA	866-2 853 (900-2)		866-2½ 853 (900-2½)		866-2¾ 853 (900-2¾)		
LNAV MDA	560/24 547 (600-½)		560/50 547 (600-1)		560/60 547 (600-1¼)		
CIRCLING	800-1 786 (800-1)		800-1¼ 786 (800-1¼)		800-2¼ 786 (800-2¼)		1000-3 986 (1000-3)

SW-3, 16 MAY 2024 to 13 JUN 2024

SW-3, 16 MAY 2024 to 13 JUN 2024