


APP CRS	Rwy Idg	6857
130°	TDZE	451
	Apt Elev	476

RNAV (RNP) Z RWY 13R


PALM SPRINGS INTL (PSP)

RNP AR APCH, RF required.		MISSED APPROACH: Climb to 900 then climbing left turn to 4000 direct TRM VORTAC and hold.
	For uncompensated Baro-VNAV systems, procedure NA below 1°C or above 54°C.	



ATIS	SOCAL APP CON	PALM SPRINGS TOWER*	GND CON	CLNC DEL	UNICOM
124.65	126.7 370.95 135.275 251.1	119.7 (CTAF) 377.05	121.9	128.35	122.95

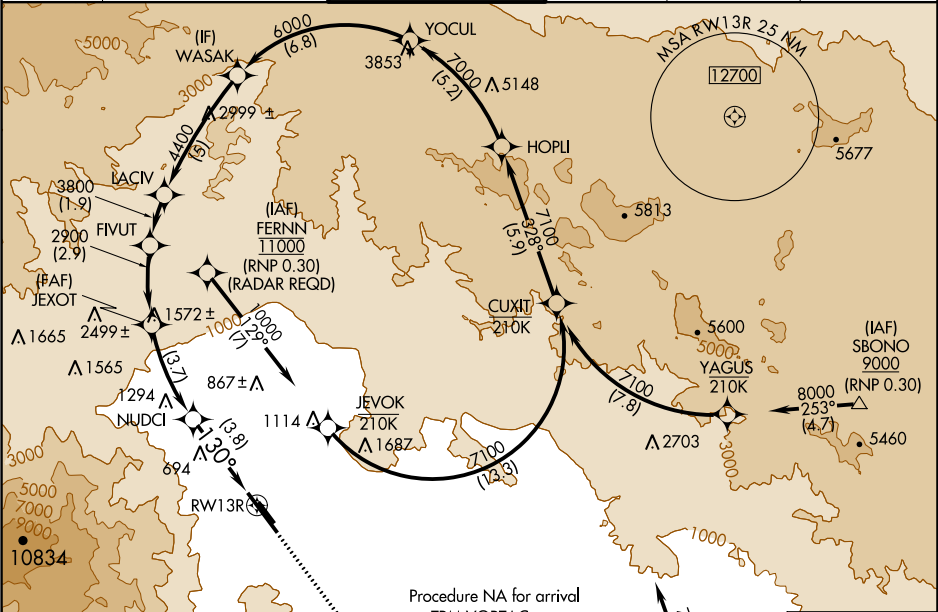

ELEV 476	D	TDZE 451
----------	----------	----------

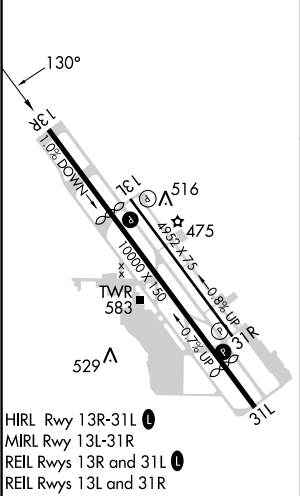

HIRL Rwy 13R-31L
MIRL Rwy 13L-31R
REIL Rwy 13R and 31L
REIL Rwy 13L and 31R

		on TRM VORTAC airway radials 263 CW 021.				MISSED APCH FIX THERMAL TRM  4 NM			
WASAK		VGSi and descent angles not coincident (VGSi Angle 3.00/TCH 47).		900		4000		TRM	
6000		LACV		FIVUT		JEXOT		NUDCI	
4400		3800		2900		1713		RW13R	
GP 3.00° TCH 45		5 NM		1.9 NM		2.9 NM		3.7 NM	
3.8 NM		130°							
CATEGORY		A		B		C		D	
RNP 0.17 DA		812-1¼		361 (400-1¼)					
RNP 0.30 DA		882-1½		431 (500-1½)					
AUTHORIZATION REQUIRED									