


|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>86612</b><br><b>W29A</b> | APP CRS<br><b>293°</b> | Rwy Idg <b>7011</b><br>TDZE <b>128</b><br>Apt Elev <b>132</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) Z RWY 29

LAURENCE G HANSCOM FLD (BED)

|                      |                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                         |                           |                                                                                     |
|----------------------|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|---------------------------|-------------------------------------------------------------------------------------|
| RNP APCH             |                                      | For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA with Boston altimeter setting. When local altimeter setting not received, use Boston altimeter setting: increase LPV DA to 377 feet, LNAV/VNAV DA to 663 feet; increase all MDAs 60 feet and LNAV Cats C and D, and Circling Cat D visibility ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility and LNAV Cat C/D to 1 ½ SM. For inop ALS when using Boston altimeter setting, increase LNAV/VNAV all Cats visibility to 1 ½ SM and LNAV Cat C/D to 1 ½ SM. |                         | MALSR<br>                 | MISSED APPROACH:<br>Climb to 2000 direct COMON and on track 297° to SOSYO and hold. |
| ATIS<br><b>124.6</b> | BOSTON APP CON<br><b>124.4 279.6</b> | HANSCOM TOWER ★<br><b>118.5 (CTAF) 0 257.2</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | GND CON<br><b>121.7</b> | CLNC DEL<br><b>121.85</b> | UNICOM<br><b>122.95</b>                                                             |

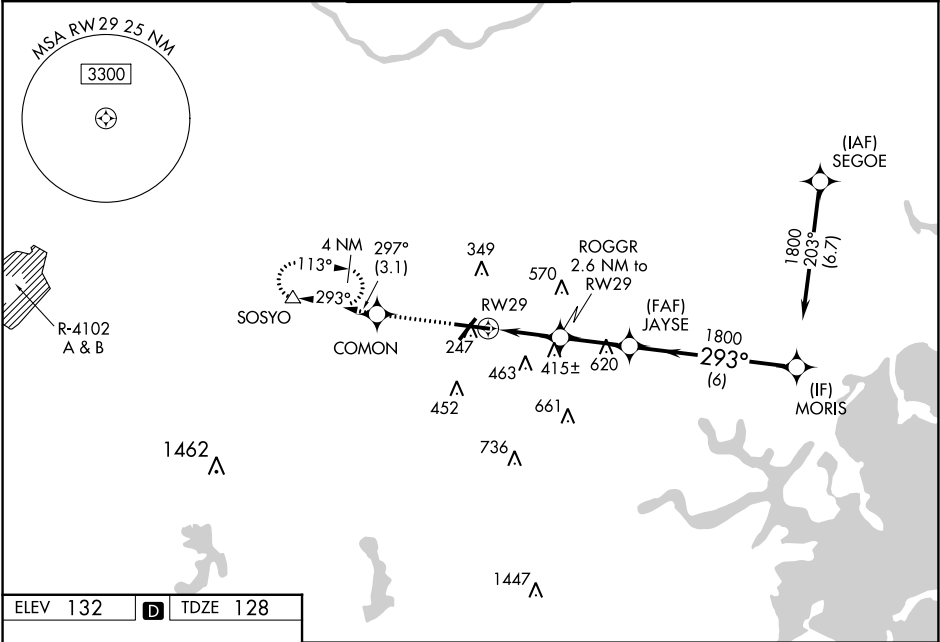

|          |          |          |
|----------|----------|----------|
| ELEV 132 | <b>D</b> | TDZE 128 |
|----------|----------|----------|

|                   |        |             |                        |                        |
|-------------------|--------|-------------|------------------------|------------------------|
| 2000<br>↑         |        | COMON<br>★  | tr<br>297°             | SOSYO<br>△             |
| *LNAV only.       |        | RW29<br>★   |                        |                        |
| 1.5 NM            |        | 1.1 NM      | 2.5 NM                 | 6 NM                   |
| CATEGORY          | A      | B           | C                      | D                      |
| LPV DA            | 328-½  |             | 200 (200-½)            |                        |
| LNAV/VNAV DA      | 614-1⅛ |             | 486 (500-1⅛)           |                        |
| LNAV MDA          | 640-½  | 512 (600-½) | 640-1                  | 512 (600-1)            |
| <b>C</b> CIRCLING | 720-1  | 588 (600-1) | 880-2¼<br>748 (800-2¼) | 920-2½<br>788 (800-2½) |