

WAAS CH 86809 W27A	APP CRS 276°	Rwy Idg 12000 TDZE 875 Apt Elev 896
--	------------------------	--

RNAV (GPS) Y RWY 27

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP APCH-GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C or above 54° C. For inop ALS, increase LNAV/VNAV all Cts visibility to 1½ SM.
** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR



MISSED APPROACH: Climb to 3000 direct SEMSE then on track 220° to AVIEW and hold.

D-ATIS		CINCINNATI APP CON		CINCINNATI TOWER		GND CON	CLNC DEL	CPDLC
ARR	DEP	119.7	363.15 (090°-269°)	118.975	360.85 (RWY 18L/36R)	121.7	127.175	
134.375	135.3	123.875	363.15 (270°-089°)	118.3	(RWYs 18C/36C, 09/27)			
				133.325	(RWY 18R/36L)			

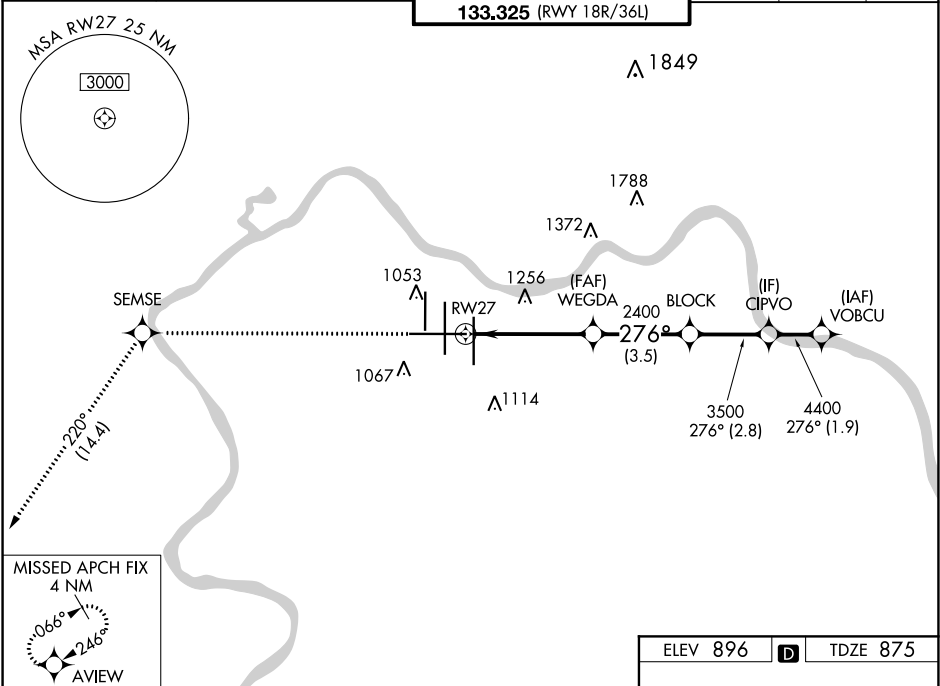

3000		SEMSE	tr 220°	AVIEW	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 68).	
3000		SEMSE	tr 220°	AVIEW	VOBCU	
3000		SEMSE	tr 220°	AVIEW	WEGDA	
3000		SEMSE	tr 220°	AVIEW	BLOCK	
3000		SEMSE	tr 220°	AVIEW	CIPVO	
3000		SEMSE	tr 220°	AVIEW	5000	
3000		SEMSE	tr 220°	AVIEW	276°	
3000		SEMSE	tr 220°	AVIEW	4400	
3000		SEMSE	tr 220°	AVIEW	3500	
3000		SEMSE	tr 220°	AVIEW	2400	
3000		SEMSE	tr 220°	AVIEW	2400	
3000		SEMSE	tr 220°	AVIEW	GP 3.00°	
3000		SEMSE	tr 220°	AVIEW	TCH 55	
3000		SEMSE	tr 220°	AVIEW	1.5 NM	
3000		SEMSE	tr 220°	AVIEW	3 NM	
3000		SEMSE	tr 220°	AVIEW	3.5 NM	
3000		SEMSE	tr 220°	AVIEW	2.8 NM	
3000		SEMSE	tr 220°	AVIEW	1.9 NM	
3000		SEMSE	tr 220°	AVIEW	A	
3000		SEMSE	tr 220°	AVIEW	B	
3000		SEMSE	tr 220°	AVIEW	C	
3000		SEMSE	tr 220°	AVIEW	D	
3000		SEMSE	tr 220°	AVIEW	1075/24	
3000		SEMSE	tr 220°	AVIEW	200 (200-½)	
3000		SEMSE	tr 220°	AVIEW	1349/50	
3000		SEMSE	tr 220°	AVIEW	474 (500-1)	
3000		SEMSE	tr 220°	AVIEW	1420/24	
3000		SEMSE	tr 220°	AVIEW	545 (600-½)	
3000		SEMSE	tr 220°	AVIEW	1420/60	
3000		SEMSE	tr 220°	AVIEW	545 (600-1¼)	
3000		SEMSE	tr 220°	AVIEW	1460-1	
3000		SEMSE	tr 220°	AVIEW	564 (600-1)	
3000		SEMSE	tr 220°	AVIEW	1560-1¾	
3000		SEMSE	tr 220°	AVIEW	664 (700-¾)	
3000		SEMSE	tr 220°	AVIEW	1560-2	
3000		SEMSE	tr 220°	AVIEW	664 (700-2)	

