

|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>58311</b><br><b>W04A</b> | APP CRS<br><b>041°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>6502</b><br><b>751</b><br><b>755</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 4

UNIVERSITY OF ILLINOIS/WILLARD (CMI)


⚠

ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). When local altimeter setting not received, use Rantoul altimeter setting and increase all DA 41 feet, and all MDA 60 feet. Increase LNAV Cat D visibility ¼ mile. DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Rantoul altimeter setting.

MISSED APPROACH: Climb to 2800 direct MUGTE and hold.

|                       |                                                                                              |                                                         |                         |                           |                         |
|-----------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------------|-------------------------|---------------------------|-------------------------|
| ATIS<br><b>124.85</b> | CHAMPAIGN APP CON ★<br><b>121.35 285.65</b> (319°-138°)<br><b>132.85 290.225</b> (139°-318°) | CHAMPAIGN TOWER ★<br><b>120.4</b> (CTAF) <b>0 229.4</b> | GND CON<br><b>121.8</b> | CLNC DEL<br><b>128.75</b> | UNICOM<br><b>122.95</b> |
|-----------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------------|-------------------------|---------------------------|-------------------------|

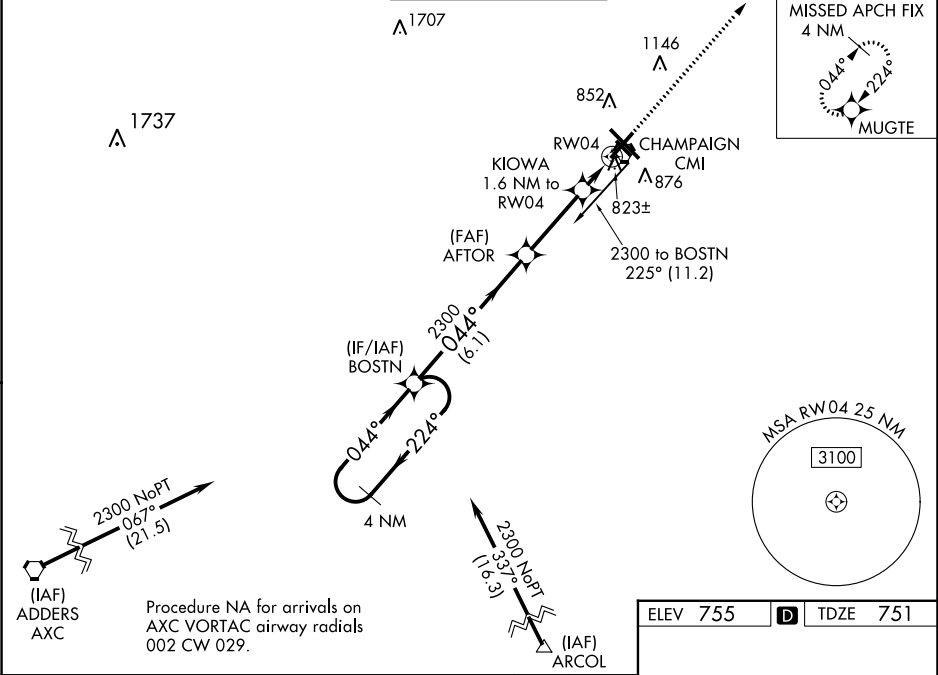

|                          |                      |                      |                      |   |
|--------------------------|----------------------|----------------------|----------------------|---|
| 4 NM Holding Pattern     |                      |                      |                      |   |
| BOSTN                    |                      |                      |                      |   |
| AFTOR                    |                      |                      |                      |   |
| KIOWA 1.6 NM to RW04     |                      |                      |                      |   |
| * LNAV only              |                      |                      |                      |   |
| * 0.9 NM to RW04         |                      |                      |                      |   |
| * 1280                   |                      |                      |                      |   |
| GP 3.00° TCH 42          |                      |                      |                      |   |
| 6.1 NM 3.1 NM 0.7 NM 0.9 |                      |                      |                      |   |
| CATEGORY                 | A                    | B                    | C                    | D |
| LPV DA                   | 1001-1 250 (300-1)   |                      |                      |   |
| LNAV/VNAV DA             | 1083-1¼ 332 (400-1¼) |                      |                      |   |
| LNAV MDA                 | 1080-1 329 (400-1)   |                      |                      |   |
| CIRCLING                 | 1240-1 485 (500-1)   | 1500-2¼ 745 (800-2¼) | 1500-2½ 745 (800-2½) |   |

