

WAAS CH 72812 W35A	APP CRS 354°	Rwy Idg TDZE Apt Elev	6500 844 846
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35


MONROE COUNTY (BMG)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Terre Haute Rgnl altimeter setting; increase LPV DA to 1165, LNAV/VNAV DA to 1465 and all MDA 140 feet and increase LPV all Cats, LNAV Cat C, D visibility ¼ SM, LNAV/VNAV all Cats and Circling C and D visibility ½ SM. For inoperative MALSR when using Terre Haute Rgnl altimeter setting: increase LPV all Cats visibility ½ mile. Baro-VNAV and VDP NA when using Terre Haute Rgnl altimeter setting. Circling to Rwy 6/24 NA at night.




MISSED APPROACH:
Climb to 3000 direct
ITYEF and hold.



ASOS 134.525	HULMAN APP CON 128.025 339.8	BLOOMINGTON TOWER ★ 120.775 (CTAF) 0	GND CON 121.9	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------



Procedure NA for arrivals at OOM VORTAC
via V305 northeast bound.



Procedure NA for arrivals at BUNKA
via V243 northbound.

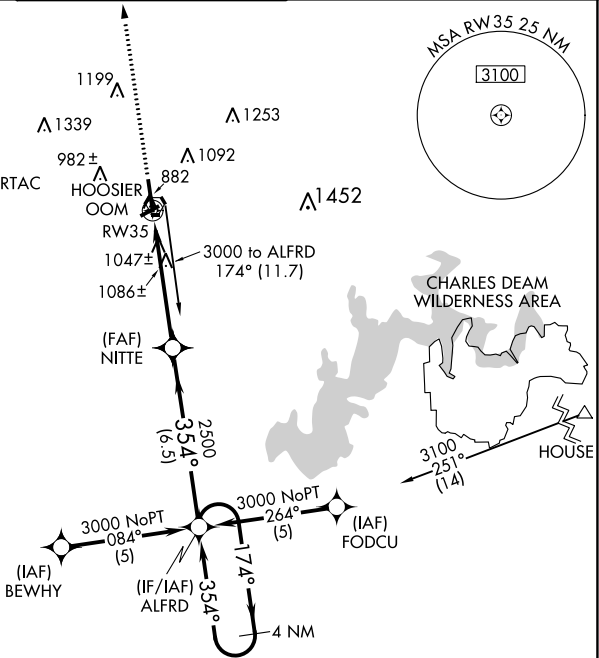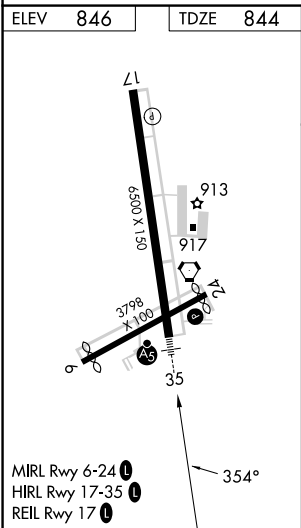

3000 ITYEF		ALFRD		4 NM Holding Pattern
*LNAV only		NITTE		174° ←354°→ 3000
RW35		2500		GP 3.00° TCH 50
1.3 NM		3.7 NM	6.5 NM	
CATEGORY	A	B	C	D
LPV DA	1044-1½		200 (200-1½)	
LNAV/VNAV DA	1344-1¼		500 (500-1¼)	
LNAV MDA	1300-1½	456 (500-½)	1300-¾ 456 (500-¾)	1300-1 456 (500-1)
CIRCLING	1380-1 534 (600-1)	1400-1 554 (600-1)	1400-1½ 554 (600-1½)	1620-2½ 774 (800-2½)