

WAAS CH 82707 W30B	APP CRS 295°	Rwy Idg TDZE 5599 Apt Elev 5673
--	------------------------	---

RNAV (GPS) RWY 30R
ROCKY MOUNTAIN METRO (BJC)

NA


Baro-VNAV and VDP NA when using Denver Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Denver Intl altimeter setting and increase all DA 82 feet and all MDA 100 feet, increase LNAV/VNAV all Cats, LNAV Cat C/D and Circling Cat C visibility ¼ mile. For inoperative MALSR, increase LNAV/VNAV all Cats visibility to 1 ½ mile and LNAV Cat C/D visibility to 1 mile. For inoperative MALSR, when using Denver Intl altimeter setting, increase LPV all Cats visibility to 1 mile, LNAV/VNAV all Cats visibility to 1 ½ mile and LNAV Cat A/B visibility to 1 mile and Cat C/D visibility to 1 ½ mile.

MALSR


A5

MISSED APPROACH: Climb to 6300 then climbing right turn to 10300 direct HYGEN and hold, continue climb-in-hold to 10300.

ATIS 126.25	DENVER APP CON 125.12 263.02	METRO TOWER★ 118.6 (CTAF) 233.7	GND CON 121.7	CLNC DEL 132.6
-----------------------	--	---	-------------------------	--------------------------

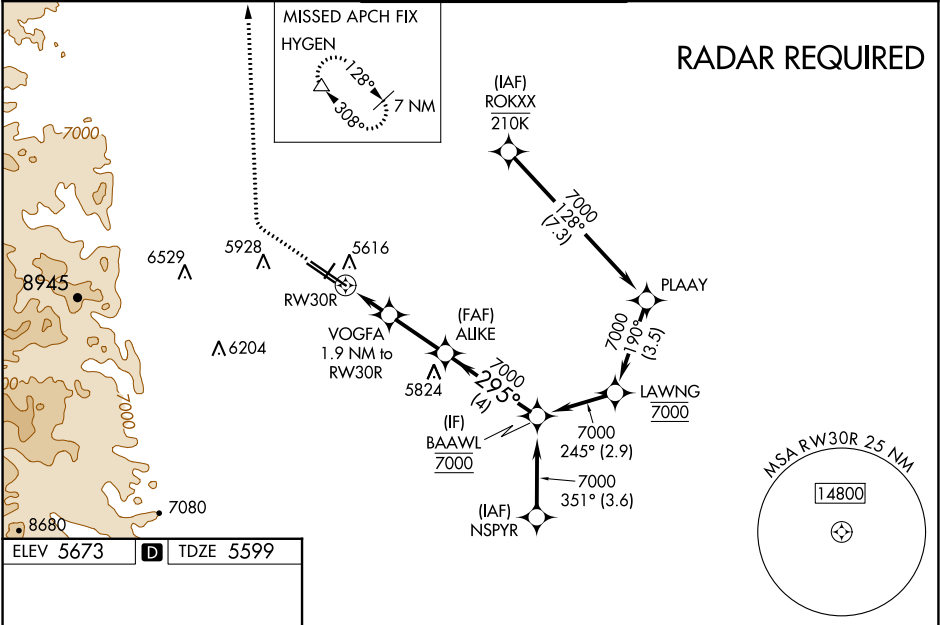

ELEV 5673	D	TDZE 5599
-----------	----------	-----------

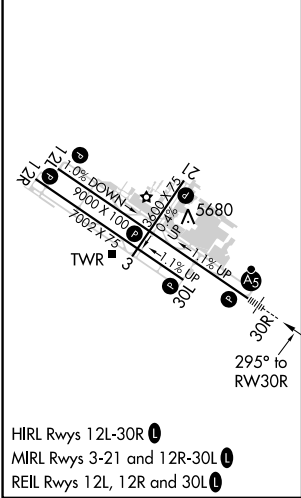

HIRL Rwy's 12L-30R **1**
MIRL Rwy's 3-21 and 12R-30L **1**
REIL Rwy's 12L, 12R and 30L **1**

6300	10300	HYGEN	ALUKE	BAOWL
↑	↷	△	7000	
*LNAV only.		VOGFA 1.9 NM to RW30R	295°	7000
RW30R		*1 NM to RW30R	7000	GP 3.00° TCH 52
-1 NM		-0.9	2.4 NM	4 NM
CATEGORY	A	B	C	D
LPV DA	5799-½ 200 (200-½)			
LNAV/VNAV DA	5900-⅝ 301 (300-⅝)			
LNAV MDA	5940-½ 341 (300-½)		5940-⅝ 341 (300-⅝)	
C CIRCLING	6180-1 507 (600-1)	6240-1 567 (600-1)	6360-2 687 (700-2)	6860-3 1187 (1200-3)