


LOC/DME I-ISM 109.75 Chan 34 (Y)	APP CRS 153°	Rwy Idg TDZE 82 Apt Elev 82
--	------------------------	---

ILS or LOC RWY 15
KISSIMMEE GATEWAY (ISM)


⚠ VDP NA with Orlando Intl altimeter setting. When local altimeter setting not received, use Orlando Intl altimeter setting and increase all DA to 309 feet, and all MDA 40 feet; increase Circling Cat C visibility ¼ SM.	MALSF 	MISSED APPROACH: Climb to 600 then climbing right turn to 2200 on heading 240° and ORL VORTAC R-200 to TEMPE INT/ORL 28 DME and hold.
---	-----------	---

ATIS 128.775	ORLANDO APP CON 119.4 351.9	KISSIMMEE TOWER ★ 124.45 (CTAF) 0	CLNC DEL 121.7	CLNC DEL 123.95 (when twr closed)	GND CON 121.7	UNICOM 122.95
------------------------	---------------------------------------	---	--------------------------	--	-------------------------	-------------------------

RADAR REQUIRED

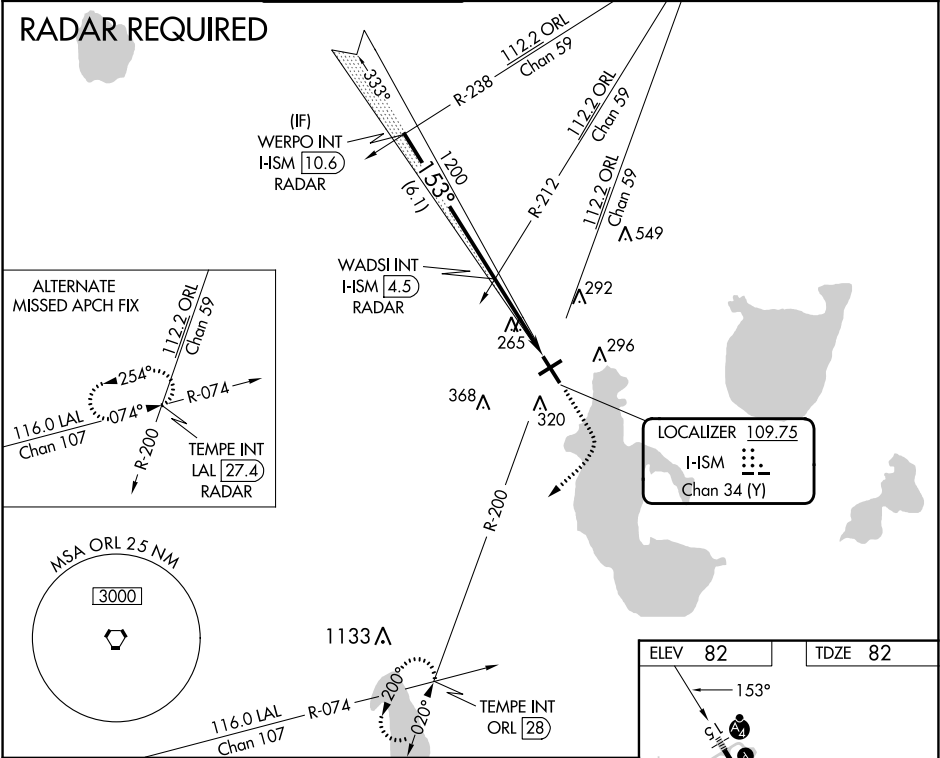

WERPO INT I-ISM 10.6 RADAR	WADSI INT I-ISM 4.5 RADAR	600	2200	ORL R-200	TEMPE INT
*LOC only.					
2000 153°					
1200					
GS 3.00° TCH 51					
6.1 NM 2.3 NM 1 NM					
CATEGORY	A	B	C	D	
S-ILS 15	282-¾ 200 (200-¾)				
S-LOC 15	440-¾ 358 (400-¾)			440-1¼ 358 (400-1¼)	
CIRCLING	680-1 598 (600-1)		680-1½ 598 (600-1½)		700-2 618 (700-2)

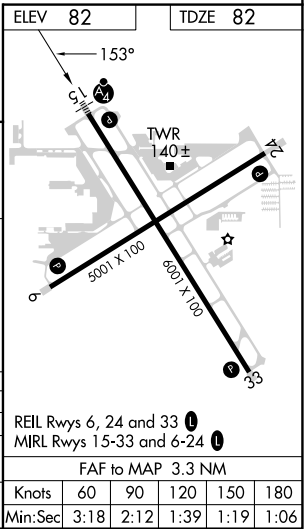

SE-3, 16 MAY 2024 to 13 JUN 2024

SE-3, 16 MAY 2024 to 13 JUN 2024