

ADF or RADAR required.


▼

VDP NA when using Port Isabel altimeter setting. For inop ALS increase S-LOC 13 Cats C and D visibility to 1 3⁄8 miles. When local altimeter setting not received, use Port Isabel altimeter setting and increase DA to 307 feet and all MDA 40 feet. S-LOC 13 Cat C and D visibility to RVR 5500, Circling Cat D visibility to 2 1⁄4 miles. For inop ALS when using Port Isabel altimeter setting increase S-LOC 13 Cats C/D visibility to 1 3⁄8 miles.

MALSR

MISSED APPROACH:
Climb to 700 then climbing left turn to 2000 direct HRL VOR/DME and hold.

ATIS 128.55	VALLEY APP CON 119.5 257.6	BROWNSVILLE TOWER * 118.9 (CTAF) 239.3	GND CON 121.9	UNICOM 122.95
----------------	-------------------------------	---	------------------	------------------

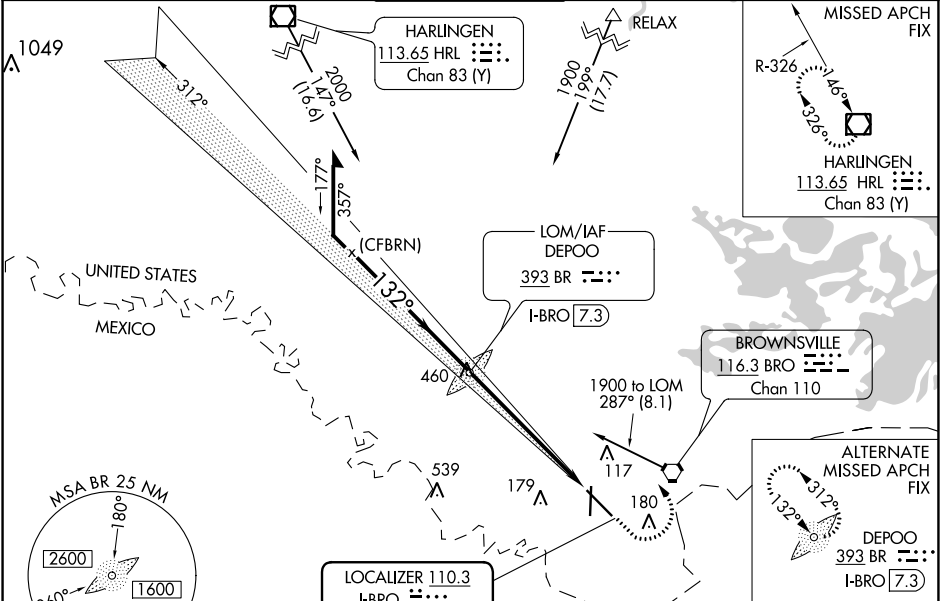

FAF 13-31
Chan 40

Remain within 10 NM

DEPOO LOM
I-BRO 7.3

700 2000 HRL

1900 312° 132° 1848

GS 2.75°
TCH 58

1900

*I-BRO 2.8 I-BRO 1.4 *LOC only.

4.6 NM 1.4 NM

CATEGORY	A	B	C	D
S-ILS 13		269/24	250 (300-1/2)	
S-LOC 13	480/24	461 (500-1/2)	480/50	461 (500-1)
CIRCLING	480-1 458 (500-1)	540-1 518 (600-1)	540-1 1/2 518 (600-1 1/2)	680-2 658 (700-2)

ELEV 22 TDZE 19

132°

13

81

45

TWR 127

6000 X 150

36

31

MIRL Rwy 18-36
HIRL Rwy 13-31

FAF to MAP 6 NM

Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00