



WAAS CH 81816 W28A	APP CRS 285°	Rwy Idg TDZE Apt Elev 7610 2858 2872	RNAV (GPS) RWY 28	
			MIDLAND INTL AIR AND SPACE PORT (M.A.F.)	


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 25°C (77°F). Circling Rwy 16L NA at night. DME/DME RNP-0.3 NA. Inop table does not apply to LPV all Cats.			MALS 	MISSED APPROACH: Climb to 5000 direct JEMMO and hold.
---	--	--	----------	---

ATIS 126.8 235.975	MIDLAND APP CON * 124.6 290.4	MIDLAND TOWER * 118.7 (CTAF) 0273.45	GND CON 121.9 348.6	CLNC DEL 118.05 317.65	UNICOM 122.95
------------------------------	---	--	-------------------------------	----------------------------------	-------------------------

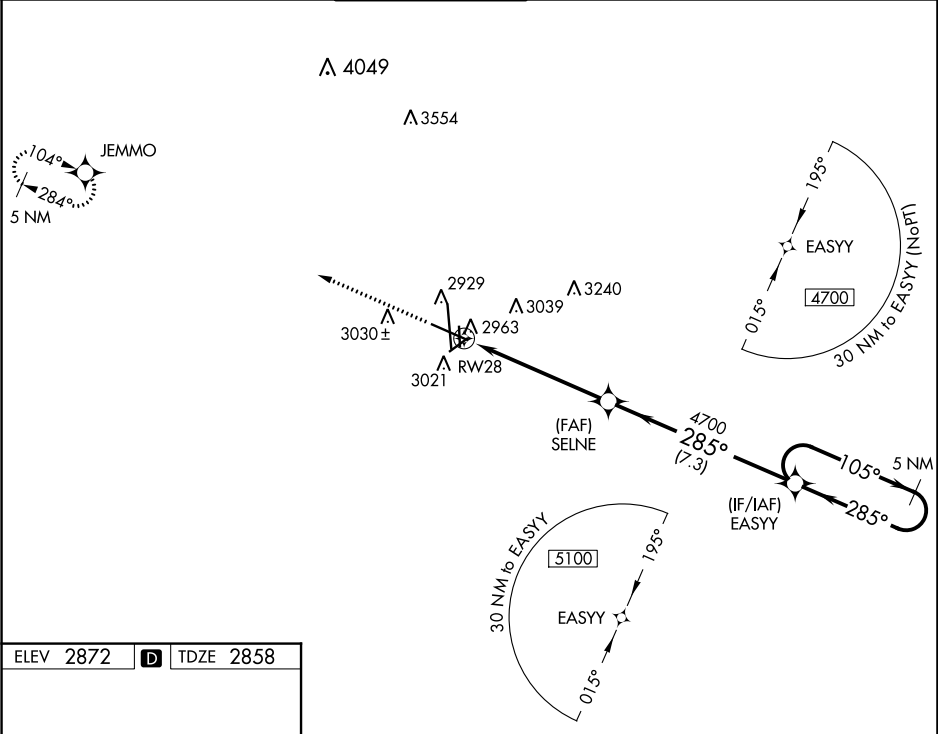

ELEV 2872	D	TDZE 2858
-----------	---	-----------

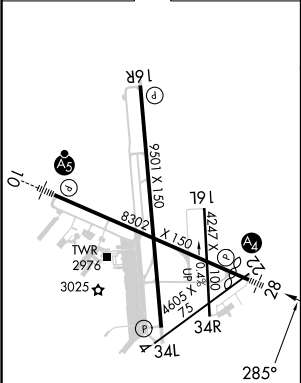

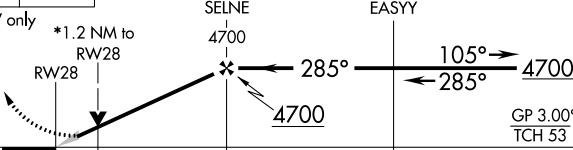5000		JEMMO		5 NM Holding Pattern	
					
*LNAV only					
CATEGORY	A	B	C	D	
LPV DA	3058-¾		200 (200-¾)		
LNAV/ VNAV DA	3271-1⅞		413 (500-1⅞)		
LNAV MDA	3280-¾ 422 (500-¾)		3280-1		422 (500-1)
CIRCLING	3440-1 568 (600-1)		3440-1½ 568 (600-1½)		3520-2 648 (700-2)