



WAAS CH 82514 W23A	APP CRS 226°	Rwy Idg TDZE Apt Elev	7031 3067 3080
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 23
ROBERTS FLD (RDM)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 53°C (128°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat C/D visibility to 1 SM.	MALSR	MISSED APPROACH: Climb to 8500 direct WELPU and on track 138° to URBIA and hold, continue climb-in-hold to 8500.
--	--------------	---

ATIS 119.025	SEATTLE CENTER 126.15 269.475	REDMOND TOWER★ 124.5 (CTAF) 0 256.8	GND CON 121.8	UNICOM 122.95
------------------------	---	---	-------------------------	-------------------------

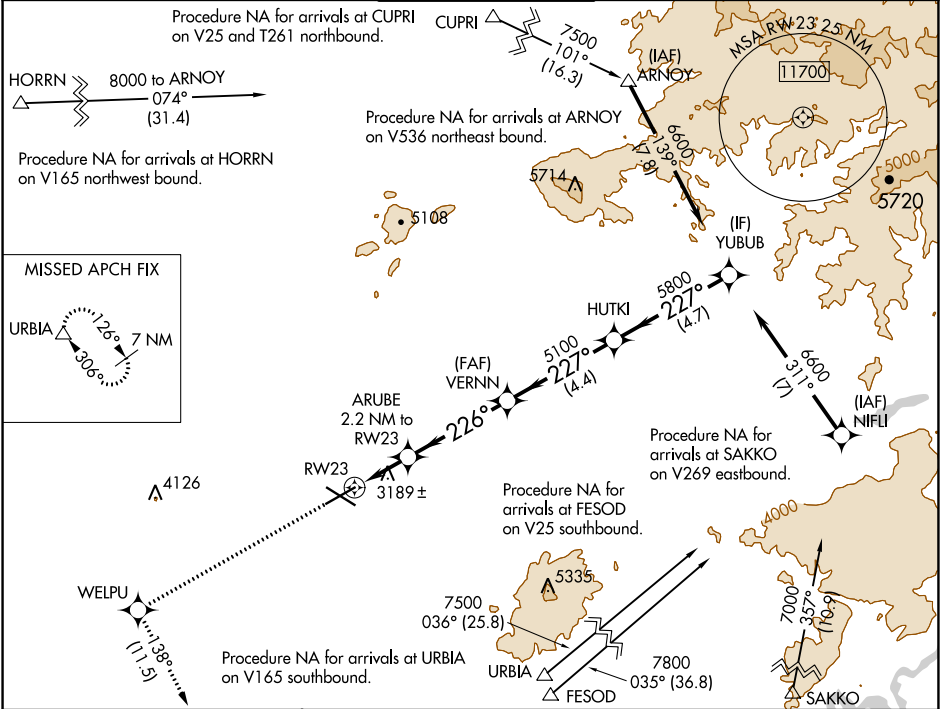

ELEV 3080	D	TDZE 3067	8500	WELPU	tr 138°	URBIA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 51).	YUBUB	
			*LNAV only ARUBE 2.2 NM to RW23 VERNN 5100 HUTKI 5800 GP 3.00° TCH 47						
CATEGORY			A		B		C		D
LPV DA			3267-½ 200 (200-½)						
LNAV/VNAV DA			3383-⅝ 316 (400-⅝)						
LNAV MDA			3440-½ 373 (400-½)				3440-¾ 373 (400-¾)		
CIRCLING			3540-1 460 (500-1)		3560-1 480 (500-1)		3640-1½ 560 (600-1½)		3760-2¼ 680 (700-2¼)