

HI-ILS or LOC RWY 10

LOC I-SAV 111.35 Chan 50 (Y)	APCH CRS 097°	Rwy Idg 9351 TDZE 30 Arpt Elev 50
--	-------------------------	--

AL-380 [USAF]

SAVANNAH/HILTON HEAD INTL (KSAV)

DME required

T Procedure NA when Control Tower closed

* When ALS inop, increase vis to RVR 40

**** When ALS inop, increase vis to 1 $\frac{3}{8}$ miles.**




MALSR



MISSED APPROACH: Climb to 800, then climbing left turn to 4000 via heading 330° and SAV VORTAC R-001 to TILLS/SAV 20 DME and hold.

ATIS ★ 123.75	APP CON 125.3 353.775	TOWER ★ 125.975 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 119.55 291.775
------------------	--------------------------	-----------------------------------	------------------------	----------------------------

• 361

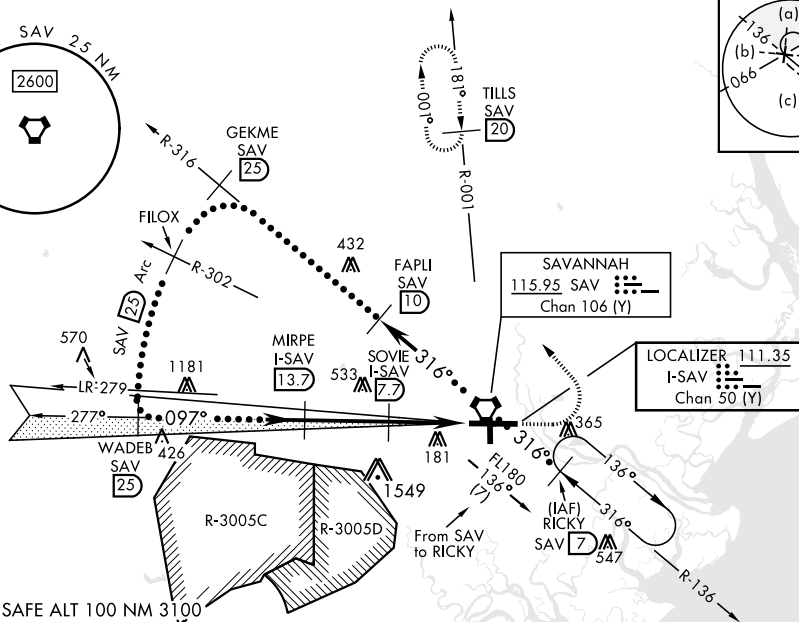



EMERG SAFE ALT 100 NM 3100


Use I-SAV DME when on the localizer course.

VGSI and ILS glidepath not coincident.

VGS angle 3.00/TCH 69.

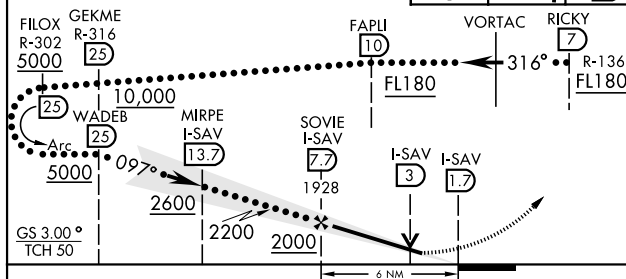

ELEV	50	D	TDZE	30
------	----	----------	------	----



CATEGORY	C	D	E
S-ILS 10 *	230/18	200	(200-½)
S-LOC 10 **	500/50	470	(500-1)
 CIRCLING	740-2 690 (700-2)	740-2 ¼ 690 (700-2¼)	900-3 850 (900-3)

REIL Rwy 19, 28 **L**

HIRL all Rwy **L**

TDZL/CL Rwy 10

SAVANNAH, GEORGIA | A

32°08'N-81°12'W

SAVANNAH/HILTON HEAD INTL (KSAV)

Amdt 8 08NOV18

HI-ILS or LOC RWY 10

SE-4, 16 MAY 2024 to 13 JUN 2024

SE-4, 16 MAY 2024 to 13 JUN 2024