


WAAS CH 93815 W36A	APP CRS 002°	Rwy Idg TDZE Apt Elev	5010 295 295
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 36

MALDEN RGNL (MAW)

RNP APCH-GPS.		MISSED APPROACH: Climb to 2100 direct GOSTE and hold.	
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.			
AWOS-3PT 119.825	MEMPHIS CENTER 133.65 292.15	GCO 135.075	UNICOM 122.8 (CTAF) 0

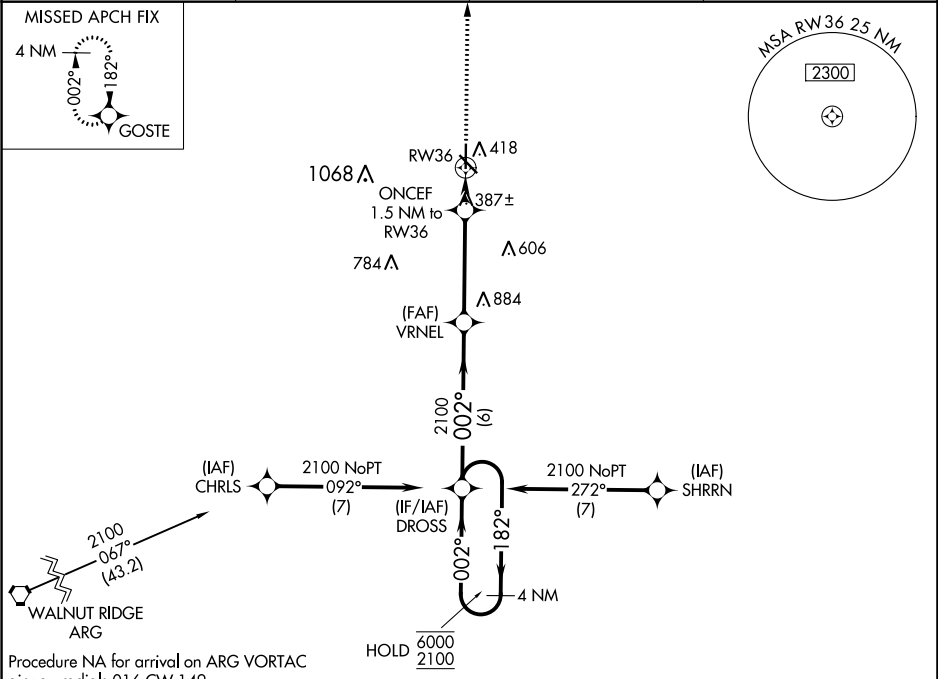

DROSS		VRNEL		2100	GOSTE
4 NM Holding Pattern		ONCEF		1.5 NM to RW36	
6000	← 182°	002° →	2100	1 NM to RW36	RW36
2100	002°				
GP 3.00°					
TCH 40					
6 NM		4 NM		0.6	1 NM
CATEGORY	A	B	C	D	
LPV DA	495-1	200 (200-1)		NA	
LNAV/ VNAV DA	545-1	250 (300-1)		NA	
LNAV MDA	640-1	345 (400-1)		NA	
CIRCLING	720-1 425 (500-1)	800-1 505 (600-1)	800-1½ 505 (600-1½)	NA	

ELEV 295

TDZE 295

REIL Rwy 14, 18, 32, and 36 0

MIRL Rwy 14-32 and 18-36 0

81

4

5010

100

500

36

35

002° to RW36