

LOC/DME I-OYC
109.5
Chan **32**

APP CRS
355°

Rwy Idg **6080**
TDZE **40**
Apt Elev **46**



ILS or LOC RWY 36
CORPUS CHRISTI INTL (CRP)

DME required.
▼ For inop ALS, increase S-ILS 36 Cat E visibility to RVR 4000 and S-LOC 36 Cat C/D/E visibility to RVR 4500.

MALSR
AS

MISSED APPROACH: Climb to 700 then climbing left turn to 2000 on heading 338° and CRP VORTAC R-287 to ATHIS INT/CRP 23.3 DME and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
----------------------	--	------------------------------------	--------------------------------	---------------------------

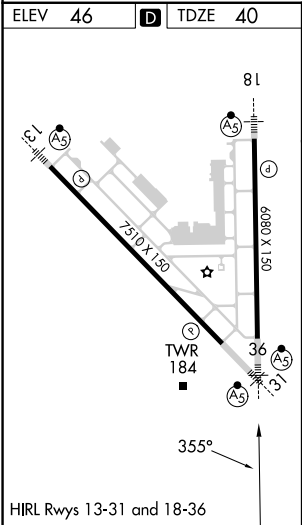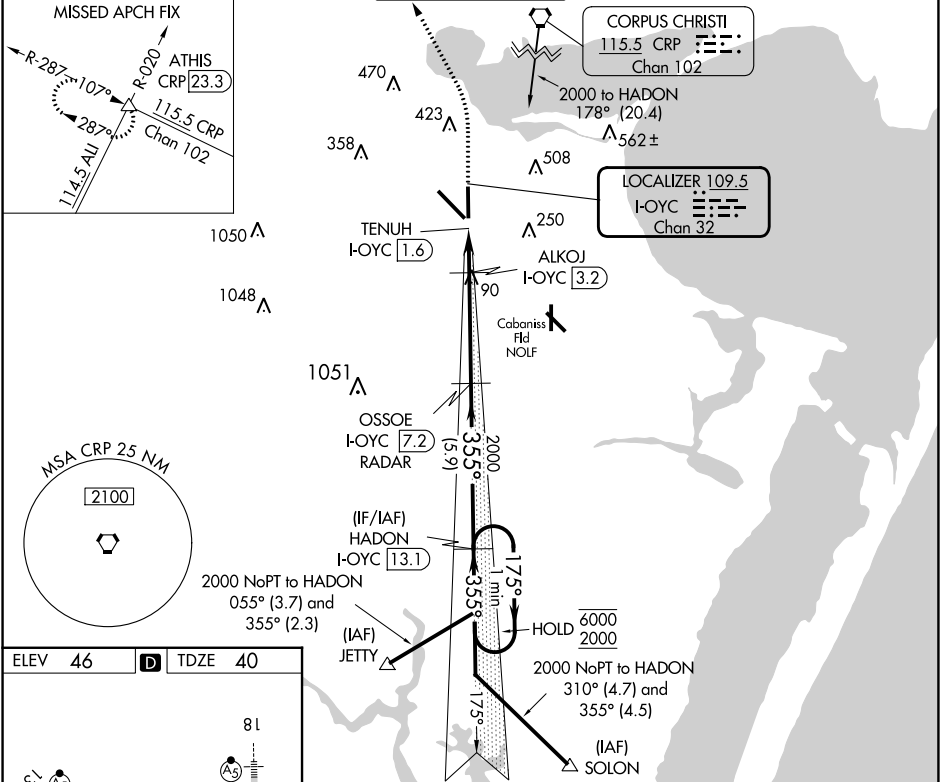

700 ↑	2000 hdg 338°	CRP R-287	ATHIS △	ILS unusable inside DA. LOC unusable within 1.6 DME.				
				OSOE I-OYC 7.2 RADAR	HADON I-OYC 13.1	One Minute Holding Pattern		
				2000 ✱	355°	175° → 6000	← 355° 2000	
				ALKOJ I-OYC 3.2	720	2000	GS 3.00° TCH 53	
				TENUH I-OYC 1.6	720	2000		
				0.4	1.6 NM	4 NM	5.9 NM	
CATEGORY	A		B	C	D		E	
S-ILS 36			240/24		200 (200-½)			
S-LOC 36			340/24		300 (300-½)			
CIRCLING	500-1 454 (500-1)	780-1 734 (800-1)	820-2¼ 774 (800-2¼)	820-2½ 774 (800-2½)	820-2¾ 774 (800-2¾)			

SC-3, 16 MAY 2024 to 13 JUN 2024

SC-3, 16 MAY 2024 to 13 JUN 2024