

WAAS CH 60914 W31A	APP CRS 312°	Rwy Idg 7510 TDZE 43 Apt Elev 46
--	------------------------	---

RNAV (GPS) Y RWY 31
CORPUS CHRISTI INTL (CRP)


RNP APCH - GPS

A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C.
Procedure NA when Cabanis Fld traffic patterns active. For inop ALS, increase LPV Cat E visibility to $\frac{3}{4}$ SM, LNAV/VNAV all Cats visibility to $\frac{7}{8}$ SM, and LNAV Cat E visibility to $1\frac{3}{8}$ SM.

MALSR

MISSED APPROACH:
Climb to 2000 direct
ATHIS and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
---------------	---------------------------------	-----------------------------	-------------------------	--------------------

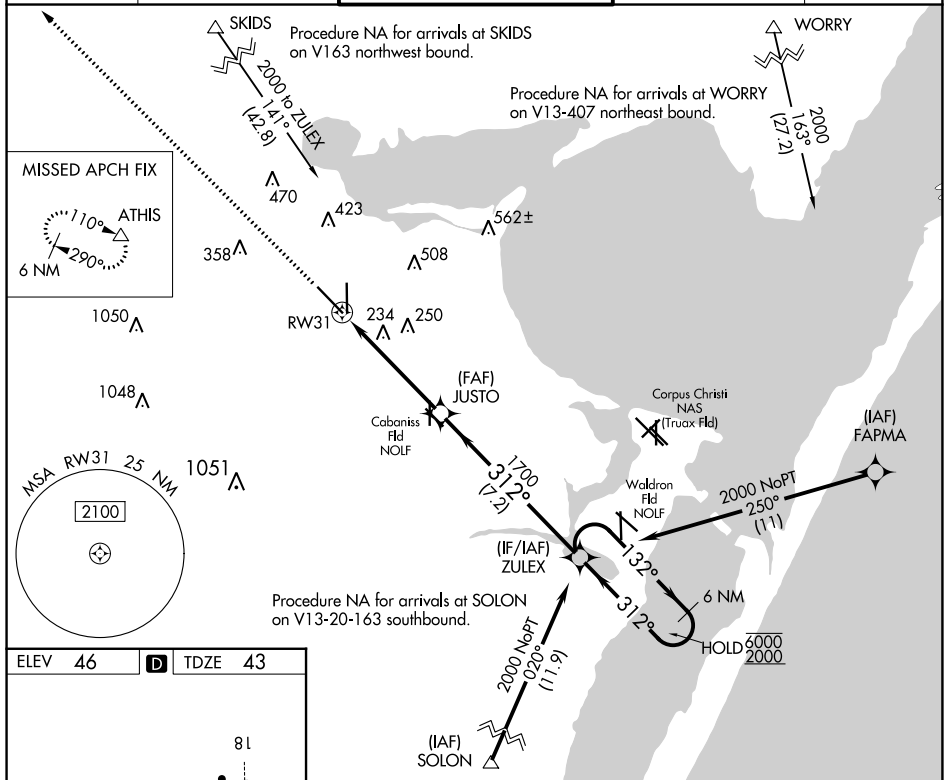

2000 ↑		ATHIS △		1.3 NM to RW31 JUSTO 1700 ZULEX 1700 6 NM Holding Pattern 132° → 6000 ← 312° 2000 GP 3.00° TCH 50 1.3 NM 3.8 NM 7.2 NM							
CATEGORY		A		B		C		D		E	
LPV DA		243- $\frac{1}{2}$ 200 (200- $\frac{1}{2}$)									
LNAV/ VNAV DA		356- $\frac{5}{8}$ 313 (400- $\frac{5}{8}$)									
LNAV MDA		500- $\frac{1}{2}$ 457 (500- $\frac{1}{2}$)				500- $\frac{7}{8}$ 457 (500- $\frac{7}{8}$)					
CIRCLING		500-1 454 (500-1)		780-1 734 (800-1)		820-2 $\frac{1}{4}$ 774 (800-2 $\frac{1}{4}$)		820-2 $\frac{1}{2}$ 774 (800-2 $\frac{1}{2}$)		820-2 $\frac{3}{4}$ 774 (800-2 $\frac{3}{4}$)	

SC-3, 16 MAY 2024 to 13 JUN 2024

SC-3, 16 MAY 2024 to 13 JUN 2024