

WAAS CH 97516 W04A	APP CRS 039°	Rwy Idg 5840 TDZE 668 Apt Elev 674
--	------------------------	---

RNAV (GPS) RWY 4
BATTEN INTL (RAC)


▼ Baro-VNAV NA when using General Mitchell Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). **▲** DME/DME RNP-0.3 NA. VDP NA when using General Mitchell Intl altimeter setting. When local altimeter setting not received, use General Mitchell Intl altimeter setting: increase LPV DA to 1023 and all visibilities ½ SM; increase LNAV/VNAV DA to 1135 and all visibilities ¾ SM; increase all MDA 40 feet and visibility Cat C and D ¼ SM. Circling Rwy 14 NA at night. Rwy 4 helicopter visibility reduction below ¾ SM NA. Inop table does not apply.

MALSF



MISSED APPROACH:
Climb to 2600 direct
PUYAF and right turn
on track 129° to
MOXUE and right
turn on track 235°
to PASQO and hold.

ASOS 121.425	MILWAUKEE APP CON 135.875 317.725	CLNC DEL 120.15	UNICOM 123.075 (CTAF) 0
------------------------	---	---------------------------	-----------------------------------

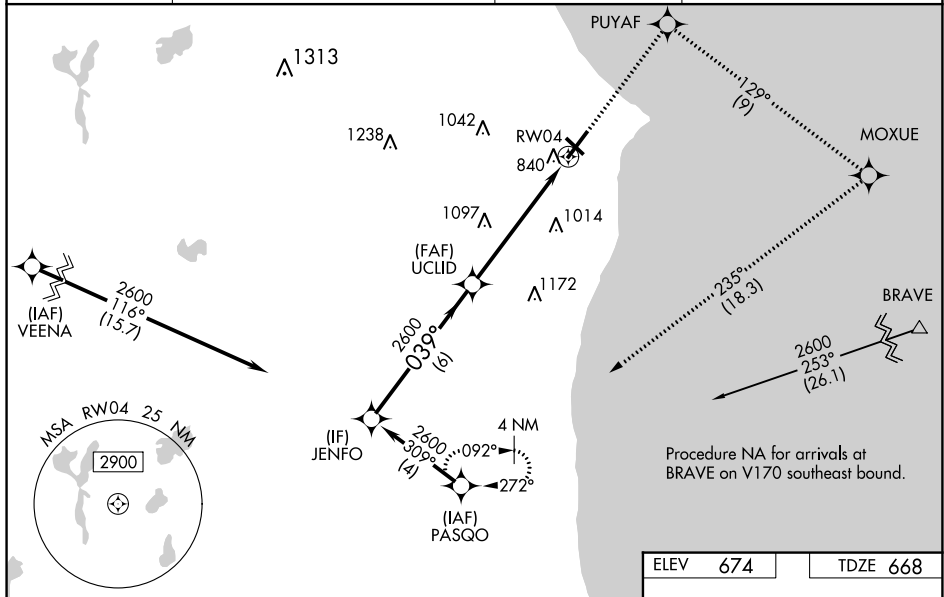

ELEV 674		TDZE 668
----------	--	----------

