

WAAS CH 73014 W03A	APP CRS 034°	Rwy Idg 5999 TDZE 624 Apt Elev 625
--	------------------------	---

RNAV (GPS) RWY 3
MENOMINEE RGNL (MNM)

RNP APCH.


⚠ Circling Rwy 14, 32 NA at night. Baro-VNAV and VDP NA when using Sturgeon Bay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Sturgeon Bay altimeter setting and increase all DA/MDA 60 feet, increase Circling Cat C/D visibility ½ SM. For Inop MALSR when using Sturgeon Bay altimeter setting increase LNAV MDA visibility Cat C/D to 1 ½. Inop table does not apply to LPV and LNAV/VNAV all Cats and LNAV MDA Cats A/B.

MALSR



MISSED APPROACH:
Climb to 2300 direct
UCINI and hold.

AWOS-3PT 121.45	GREEN BAY APP CON ★ 120.3 338.2	UNICOM 122.8 (CTAF) 0
---------------------------	---	---------------------------------

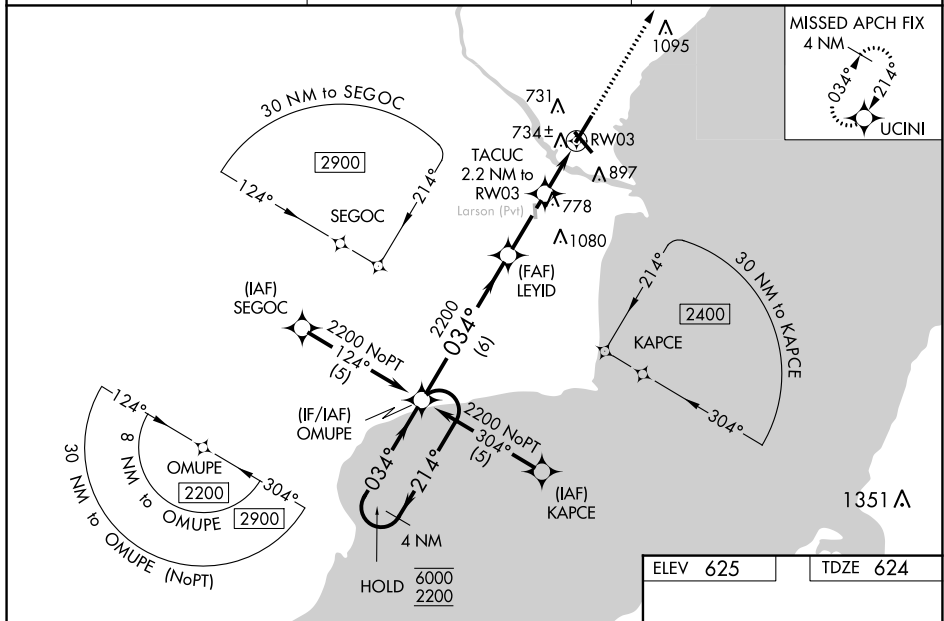

EC-1, 16 MAY 2024 to 13 JUN 2024

EC-1, 16 MAY 2024 to 13 JUN 2024

4 NM Holding Pattern

OMUPE
LEYID
TACUC
RW03

2200
2200
2200
2200

6 NM
2.6 NM
1.1 NM
1.1 NM

← 214°
→ 034°
↖ 034°
↗ 034°

*INAV only

GP 3.00°
TCH 49

CATEGORY	A	B	C	D
LPV DA	824-1 200 (200-1)			
INAV/ VNAV DA	1150-1½ 526 (600-1)			
INAV MDA	1000-1 376 (400-1)			
C CIRCLING	1200-1 575 (600-1)	1200-1½ 575 (600-1½)	1380-2½ 755 (800-2½)	

