

HAYDEN, COLORADO

AL-5983 (FAA)

24137

LOC/DME I-HDN 109.9 Chan 36	APP CRS 104°	Rwy Idg 9490 TDZE 6591 Apt Elev 6606
---	------------------------	---

ILS or LOC RWY 10
YAMPA VALLEY (HDN)

DME required.

T
A NA Inop table does not apply to S-ILS 10* all
Cats and S-LOC 10 Cats C/D. For inop ALS,
increase S-ILS 10 all Cats visibility to 2½ SM.

MALSF



MISSED APPROACH: Climb to 8000 then climbing right turn to 13300 on heading 130° and on CHE VOR/DME R-114 to TILLU/CHE 27.9 DME and hold, continue climb-in-hold to 13300. *Missed approach requires minimum climb of 307 feet per NM to 8700.

AWOS-3PT
119.275

DENVER CENTER
120.475 235.975


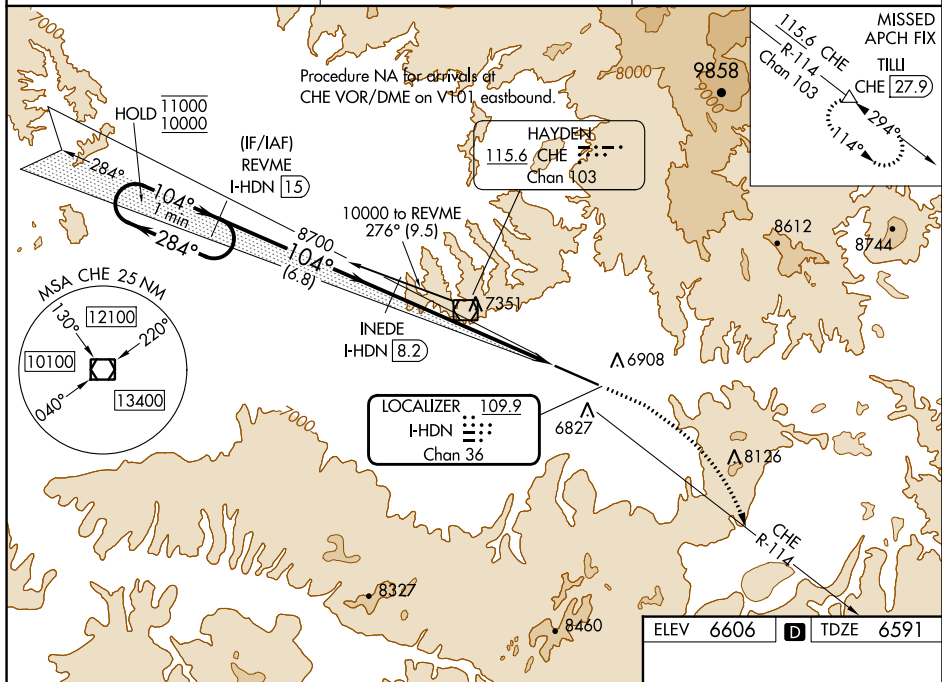
UNICOM
123.0 (CTAF) **L**

Figure 1: Example of a flight profile. The diagram illustrates a flight path with various altitude and distance markers. Key parameters include: One Minute Holding Pattern at 11000 ft, REVME I-HDN 15, INEDE I-HDN 8.2, I-HDN 5.2, and I-HDN 1.7. The flight path is defined by angles of 284°, 104°, and 104°. The distance between the 8700 ft and 5200 ft points is 3 NM. The distance between the 5200 ft and 1.7 I-HDN points is 3.5 NM. The distance between the 1.7 I-HDN point and the 1.14 R-114 point is 6.8 NM. The flight path is labeled GS 3.00° and TCH 55. The flight path is labeled 8000, 13300, and 130° hdg. The flight path is labeled CHE R-114 and TILLI.

CATEGORY	A	B	C	D
S-ILS 10*	6791- ³ / ₄ 200 (200- ³ / ₄)			
S-ILS 10	7414-2 823 (900-2)			
S-LOC 10	7760-1 1169 (1200-1)	7760-1 ¹ / ₄ 1169 (1200-1 ¹ / ₄)	7760-3	1169 (1200-3)
C CIRCLING	7760-1 ¹ / ₄ 1154 (1200-1 ¹ / ₄)	7760-1 ¹ / ₂ 1154 (1200-1 ¹ / ₂)	7900-3 1294 (1300-3)	8200-3 1594 (1600-3)

ELEV	6606		TDZE	6591
------	------	---	------	------



REIL Rwy 28 **L**
HIRL Rwy 10-28 **L**

HAYDEN, COLORADO

Amdt 1A 16MAY24

40°29'N-107°13'W

YAMPA VALLEY (HDN)

ILS or LOC RWY 10

SW-1, 16 MAY 2024 to 13 JUN 2024