


RNP APCH.		MISSED APPROACH: Climb to 3000 direct ILOPY and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. ▲		
AWOS-3 118.375	FORT WORTH CENTER 124.75 323.0	UNICOM 123.0 (CTAF) 0

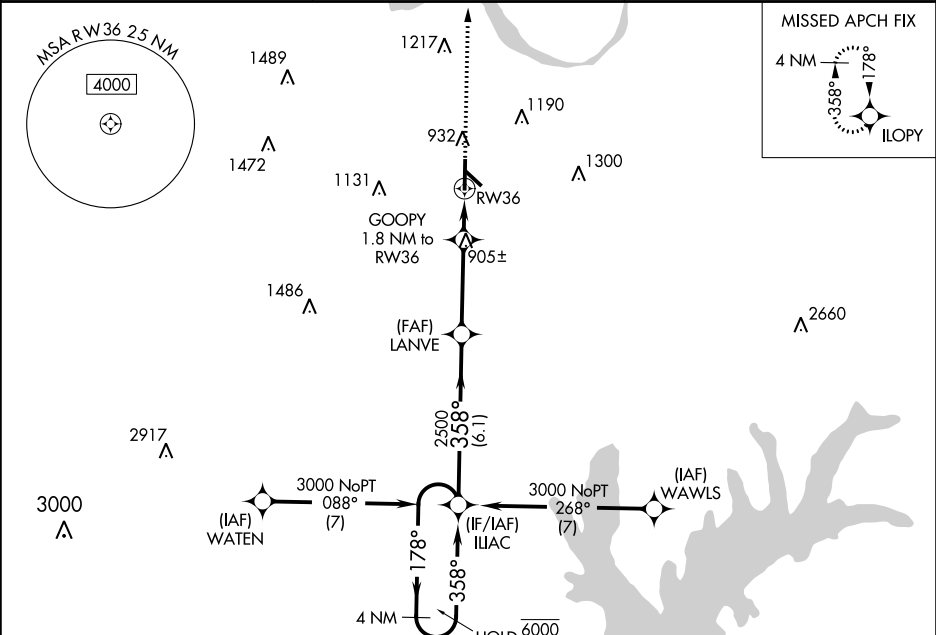

		ELEV 846		TDZE 818	
		4 NM Holding Pattern GP 3.00° TCH 45 IIAC LANVE 2500 GOOPY 1.8 NM to RW36 *1 NM to RW36 RW36 *LNAV only.			
		3000 ILOPY			
		6000 ← 178° 3000 → 358° 2500 *1420 6.1 NM 3.4 NM 0.8 1 NM			
CATEGORY	A	B	C	D	
LPV DA	1068-¾		250 (300-¾)		
LNAV/VNAV DA	1068-¾		250 (300-¾)		
LNAV MDA	1160-1		342 (400-1)		
CIRCLING	1300-1 454 (500-1)	1340-1 494 (500-1)	1520-2 674 (700-2)	1600-2½ 754 (800-2½)	

81

6000 X 100

4307 X 75

0.8% UP

0.9% UP

36

358°

MIRL Rwy 18-36

REIL Rws 18 and 36