

WAAS CH 70614 W17A	APP CRS 172°	Rwy Idg 5502 TDZE 2176 Apt Elev 2189
--	------------------------	---

RNAV (GPS) RWY 17

WEST WOODWARD (WWR)

RNP APCH.


	Baro-VNAV and VDP NA when using Gage altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use Gage altimeter setting and increase all DA/MDA 40 feet. Inop table does not apply. Circling Rwy 5, 23 NA at night.
---	--

ODALS



MISSED APPROACH:
Climb to 4500 direct
TISSY and hold.

AWOS-3 118.425	KANSAS CITY CENTER 126.95 379.2	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

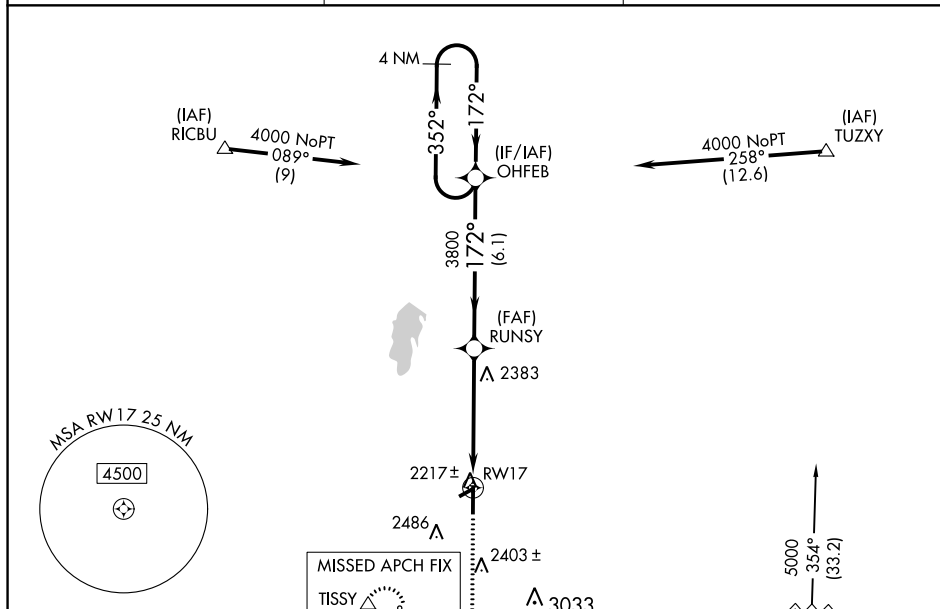

ELEV 2189 TIDE 2176

172°

3.52°

172°

5 NM

4500

TISSY

*LNAV only.

*1.6 NM to RW17

RUNSY

OHFEB

352°

172°

4000

4 NM Holding Pattern

GP 300° TCH 39

2500 X 60

5502 X 100

0.5% UP

2230

35

1.6 NM

3.4 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA	2426-1 250 (300-1)			
LNAV/VNAV DA	2572-1½ 396 (400-1½)			
LNAV MDA	2700-1 524 (600-1)	2700-1½ 524 (600-1½)	2700-1¾ 524 (600-1¾)	2700-1¾ 524 (600-1¾)
CIRCLING	2700-1 511 (600-1)	2860-1 671 (700-1)	2940-2¼ 751 (800-2¼)	2960-2½ 771 (800-2½)

REIL Rwy 35

MIRL Rwy 5-23 and 17-35