

WAAS CH 50416 W02A	APP CRS 020°	Rwy Idg 6100 TDZE 3786 Apt Elev 3788
--	------------------------	---


RNAV (GPS) RWY 2
HEREFORD MUNI (HR.X)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 41°C (105°F).

⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rick Husband Amarillo Intl altimeter setting: Increase LPV DA to 4098 feet and all Cats visibility ¼ SM, increase LNAV/VNAV DA to 4238 feet and all Cats visibility ¼ SM, increase all MDA 120 feet; increase LNAV Cats C/D visibility ¼ SM, increase Circling Cat C visibility ½ SM and Cat D visibility ¼ SM. Baro-VNAV NA when using Rick Husband Amarillo Intl altimeter setting. VDP NA with Rick Husband Amarillo Intl altimeter setting.

MISSED APPROACH:
Climb to 6000 direct
WAHLO and hold.

AWOS-3 118.05	AMARILLO APP CON ★ 119.5 307.0	UNICOM 122.8 (CTAF) 0
-------------------------	--	---------------------------------

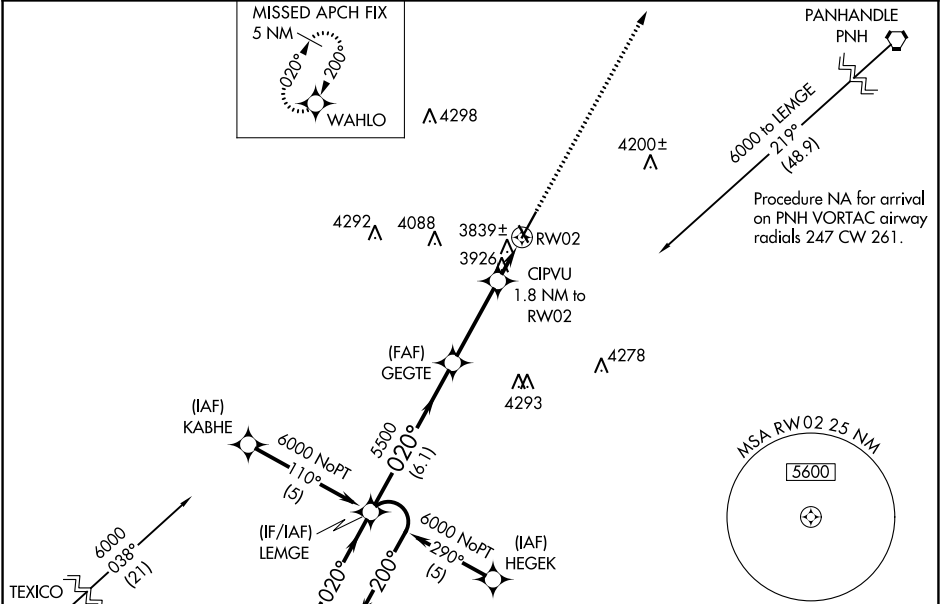

ELEV 3788 TDZE 3786

5 NM Holding Pattern LEMGE

GP 3.00° TCH 52

5500

4400

6000

WAHLO

6000

1.3 NM to RW02

*1.3 NM to RW02

*LNAV only.

RW02

020° to RW02

MIRL Rwy 2-20 0

CATEGORY	A	B	C	D
LPV DA	3986-3/4 200 (200-3/4)			
LNAV/VNAV DA	4126-1 3/4 340 (400-1 1/4)			
LNAV MDA	4240-1	454 (500-1)	4240-1 1/4 454 (500-1 1/4)	4240-1 1/2 454 (500-1 1/2)
CIRCLING	4280-1	492 (500-1)	4440-1 3/4 652 (700-1 3/4)	4620-2 3/4 832 (900-2 3/4)

SC-2, 16 MAY 2024 to 13 JUN 2024

SC-2, 16 MAY 2024 to 13 JUN 2024