


WAAS CH 70422 W04A	APP CRS 036°	Rwy Idg 5199 TDZE 3488 Apt Elev 3543
--	------------------------	---

RNAV (GPS) RWY 4

LAUREL MUNI (6S8)

RNP APCH. ▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Billings altimeter setting. Baro-VNAV and VDP NA when using Billings altimeter setting. Rwy 4 helicopter visibility reduction below ¾ SM NA.		MISSED APPROACH: Climb to 4300 then climbing right turn to 7000 direct JIBES and hold.
AWOS-2 135.05	BILLINGS APP CON 119.2 120.5 284.6	AUNICOM 123.05 (CTAF) 0

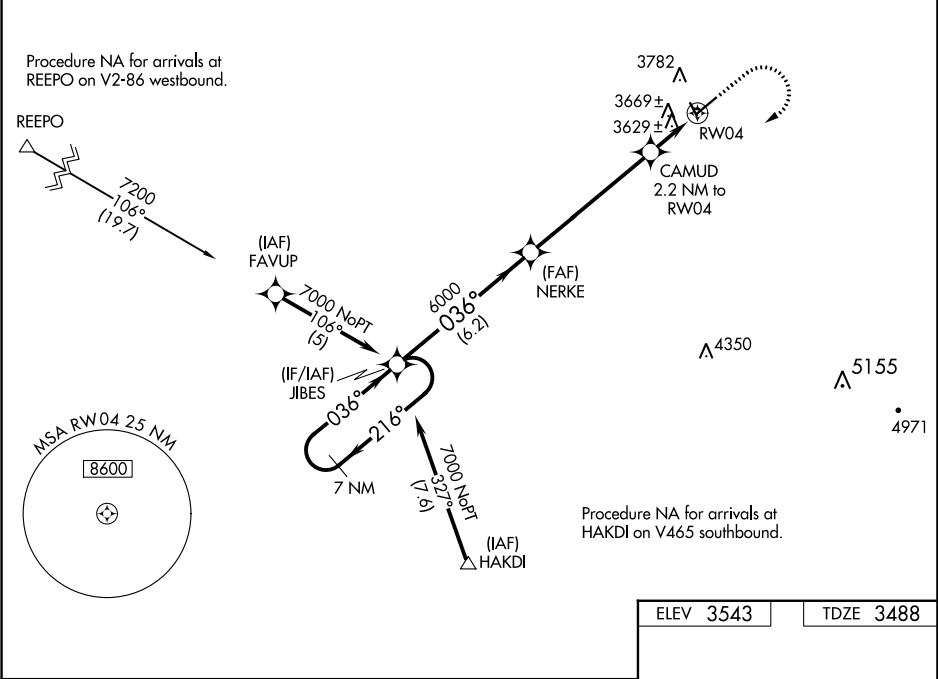

7 NM Holding Pattern 7000 GP 3.00° TCH 33		JIBES		NERKE		CAMUD 2.2 NM to RW04 *LNAV only.		4300 7000 JIBES	
		216° 036°		036° 6000		*1.4 NM to RW04 RW04		3002 X 60 1100 X 60 5190 X 75 0.6° UP 2.4° UP 2.0° UP 3529	
		6.2 NM		5.6 NM		0.8 1.4		036° to RW04	
CATEGORY	A	B		C		D			
LPV DA	3783-1 295 (300-1)								
LNAV/VNAV DA	3981-1¾ 493 (500-1¾)								
LNAV MDA	3980-1 492 (500-1)				3980-1⅔ 492 (500-1⅔)				
MIRL Rwy 4-22 and 14-32 0									