


WAAS CH 99537 W35A	APP CRS 353°	Rwy Idg TDZE Apt Elev	5007 3610 3610
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35

TRIBUNE MUNI (5K2)


▽ △ NA Baro-VNAV NA when using Syracuse altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Syracuse altimeter setting. When local altimeter setting not received, use Syracuse altimeter setting and increase all DA 103 feet and all MDA 120 feet, increase LPV/LNAV/VNAV visibility ¼ mile all Cats, and LNAV visibility Cat C ¾ mile and Circling visibility Cat C ¼ mile.	MISSED APPROACH: Climb to 6000 direct ELOSE and hold.
--	--


AWOS-3PT 119.075	DENVER CENTER 133.4 377.175	UNICOM 122.8 (CTAF)
----------------------------	---------------------------------------	-------------------------------

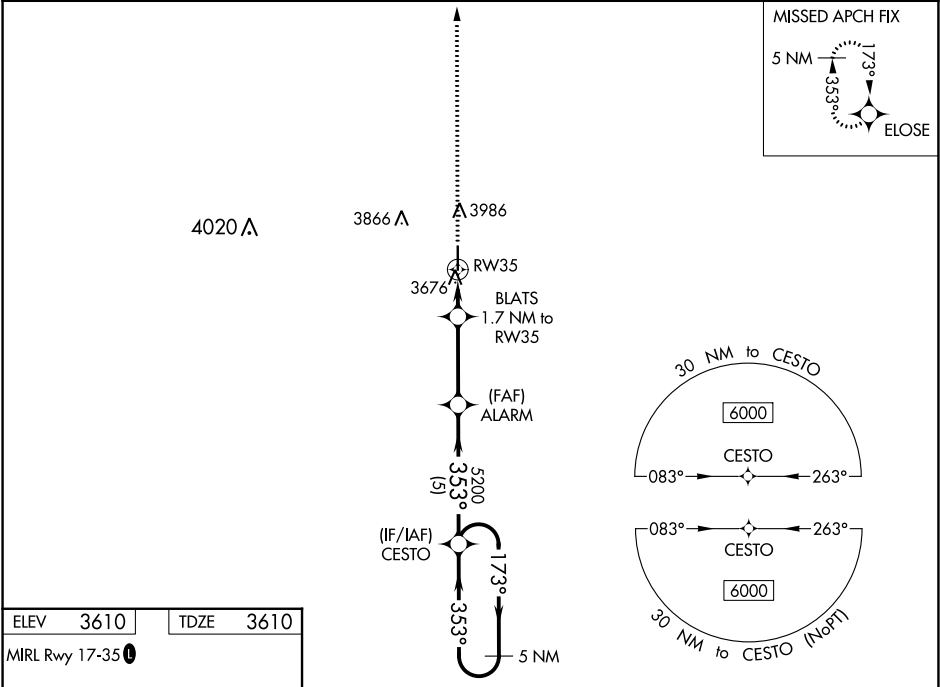

ELEV 3610	TDZE 3610
-----------	-----------

MIRL Rwy 17-35

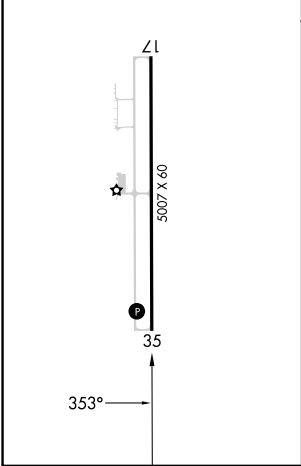

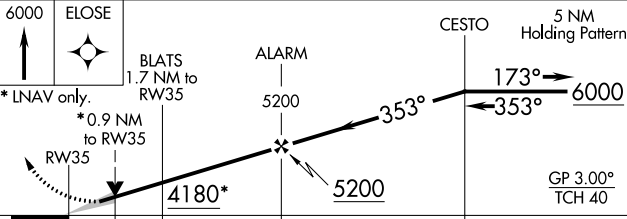6000	ELOSE				
* LNAV only.					
CATEGORY		A	B	C	D
LPV DA		3860-1	250 (300-1)		NA
LNAV/VNAV DA		3860-1	250 (300-1)		NA
LNAV MDA		3940-1	330 (400-1)		NA
C CIRCLING		4300-1	690 (700-1)	4300-2 690 (700-2)	NA