

LOC I-MSL	APP CRS	Rwy Idg	6694
109.7	297°	TDZE	551
		Apt Elev	551

ILS Y or LOC Y RWY 30

NORTHWEST ALABAMA RGNL (MSL)

RNAV 1 - GPS.

DME required.


⚠

DME from MSL DME. Simultaneous reception of I-MSL and MSL DME required. For inop ALS increase S-LOC 30 Cats C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 direct JOBUM and hold, continue climb-in-hold to 3000.

ASOS	MEMPHIS CENTER	GCO	UNICOM
119.425	120.8 307.0	121.725	123.05 (CTAF) 0

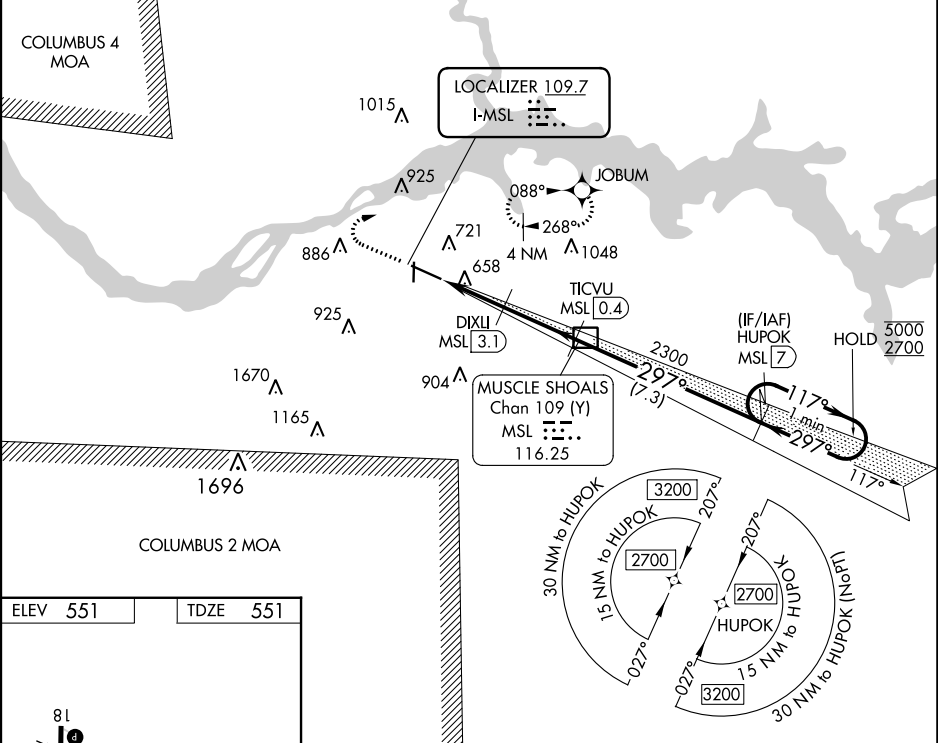

ELEV 551	TDZE 551
----------	----------

81

12

612

36

4000 X 100

6694 X 150

REIL Rwy 12 0

MIRL Rwy 18-36 0

HIRL Rwy 12-30 0

1200	3000	JOBUM	MSL DME	HUPOK MSL 7	One Minute Holding Pattern
------	------	-------	---------	-------------	----------------------------

1200

3000

JOBUM

MSL DME

HUPOK MSL 7

One Minute Holding Pattern

2300

1400

297°

117°

5000

2700

GS 3.00°

TCH 59

1 NM

1.5 NM

2.8 NM

7.3 NM

CATEGORY	A	B	C	D
S-ILS 30		751-1/2	200 (200-1/2)	
S-LOC 30	920-1/2	369 (400-1/2)	920-5/8	369 (400-5/8)
CIRCLING	1040-1	489 (500-1)	1280-2	1280-2 1/4