

DELAND, FLORIDA

AL-483 (FAA)

23278

WAAS CH 50300 W12A	APP CRS 122°	Rwy Idg 6001 TDZE 74 Apt Elev 79
--	------------------------	---

RNAV (GPS) RWY 12


DELAND MUNI-SIDNEY H TAYLOR FLD (DED)

RNP APCH.


For air/compensated baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Daytona Beach Intl altimeter setting. Rwy 12 helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received use Daytona Beach Intl altimeter setting increase all DA/MDA 40 feet, increase LNAV/VNAV visibility $\frac{1}{4}$ SM all Cats.

MISSED APPROACH: Climb to 2000 direct CUGAK then on track 139° to OAKIE and hold.


AWOS-3 119.575	DAYTONA APP CON 125.35 322.3	UNICOM 123.075 (CTAF) 0
--------------------------	--	-----------------------------------

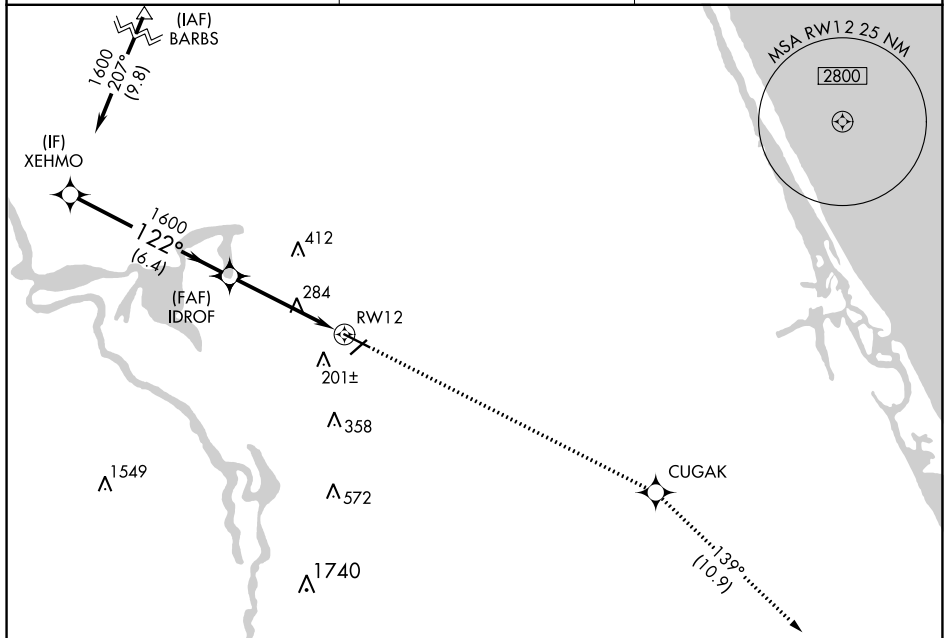

ELEV 79		TDZE 74
---------	--	---------

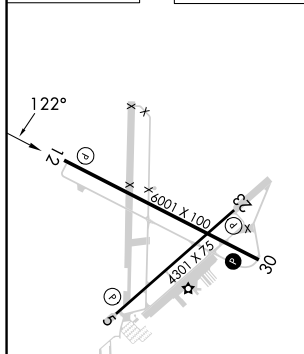

HIRL Rwy 12-30 **L**
MIRL Rwy 5-23 **L**
REIL Rwys 12 and 30 **L**

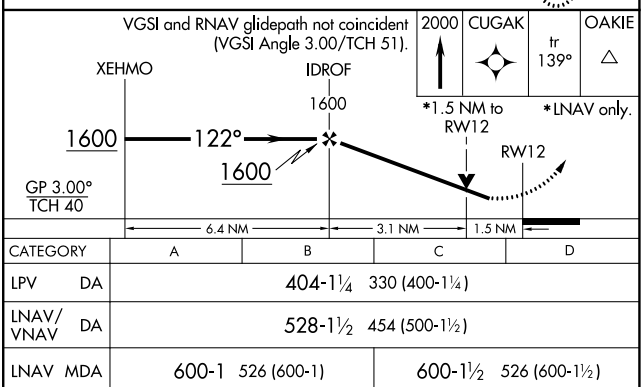

DELAND, FLORIDA

Orig-B 18JUL19

DELAND MUNI-SIDNEY H TAYLOR FLD (DED)

29°04'N-81°17'W

RNAV (GPS) RWY 12

SE-3, 16 MAY 2024 to 13 JUN 2024

SE-3, 16 MAY 2024 to 13 JUN 2024