

LOC/DME I-PQL	APP CRS	Rwy Idg
110.1	168°	6501
Chan 38		TDZE 17
		Apt Elev 17

ILS or LOC RWY 17

TRENT LOTT INTL (PQL)


⚠

When local altimeter setting not received, use Mobile Rgnl altimeter setting and increase DA to 292 feet; increase all MDA 80 feet and S-LOC 17 visibility Cat B ¼ SM, increase Circling visibility Cats B and C ¼ SM. OTIME Fix Minimums, increase S-LOC 17 visibility Cats C and D ½ SM and Circling Cats C and D ½ SM. For inop ALS when using Mobile Rgnl altimeter setting increase S-ILS all Cats visibility to ¾ SM.

MALSR

MISSED APPROACH: Climb to 900 then climbing left turn to 2000 direct SJI VORTAC and hold.

ATIS	MOBILE APP CON★	TRENT LOTT TOWER★	GND CON	CLNC DEL	UNICOM
135.175	121.0 307.1	118.575 (CTAF) 0	121.725	121.725	122.8

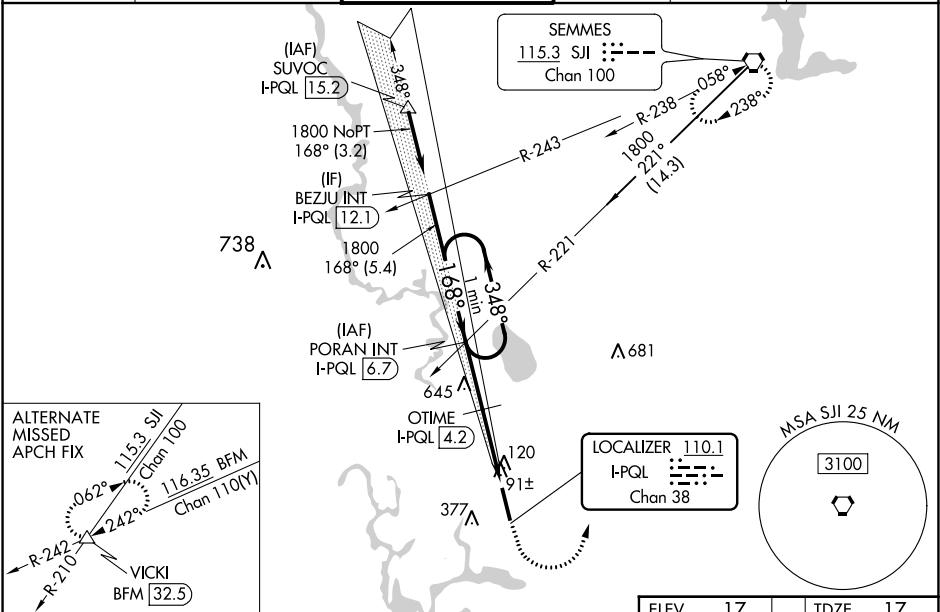

GS 3.00° TCH 50	
CATEGORY	A B C D
S-ILS 17	217-1/2 200 (200-1/2)
S-LOC 17	900-3/4 883 (900-3/4) 900-2 883 (900-2)
CIRCLING	900-1 1/4 883 (900-1 1/4) 900-2 3/4 883 (900-2 3/4) 900-3 883 (900-3)
OTIME FIX MINIMUMS	
S-LOC 17	360-1/2 343 (400-1/2) 360-5/8 343 (400-5/8)
CIRCLING	480-1 680-1 680-1 3/4 680-2 463 (500-1) 663 (700-1) 663 (700-1 3/4) 663 (700-2)

ELEV	17	TDZE	17
168°			
TWR			
MIRL Rwy 17-35			
FAF to MAP 5.4 NM			
Knots	60	90	120 150 180
Min:Sec	5:24	3:36	2:42 2:10 1:48